

# DOWNLIGHT TRACK LIGHT

# INDEX

**AXEL  
D88**



p. 04

**AXEL IP67  
D87**



p. 10

**EIDOS CEILING  
D91/C**



p. 16

**EIDOS RECESSED  
D91/R**



p. 22

**EIDOS PENDANT  
CEILING  
D92/C**



p. 28

**EIDOS PENDANT  
RECESSED  
D92/R**




p. 34

**EIDOS TRACK 48V  
D90**



p. 40

**EIDOS TRACK 220V  
D89**



p. 46

**S-LINE TRACK 220V  
D81**



p. 54

# D88 AXEL

Axel is a family of downlights for recessed ceilings, in the indoor version or for damp environments. The wide range of sizes, powers and optics satisfy every application need in a professional way. The Axel spotlight is easy to install and can be mounted on 5-20 mm thick panels, available in the fixed or adjustable, trim or trimless version.



Axel è una famiglia di downlight per incasso a soffitto, in versione da interno o per ambienti umidi. La vasta gamma di misure, potenze e ottiche soddisfano, in modo professionale, ogni esigenza applicativa. Il faretto Axel è di semplice installazione e può essere montato su pannelli di spessore 5-20 mm, disponibile in versione fixed o adjustable, trim o trimless.



LANEROSI SHOWROOM, MILAN

# D88 AXEL TRIM

**FIXED**

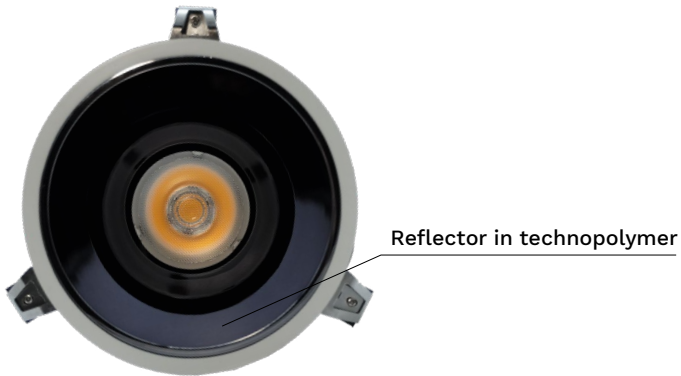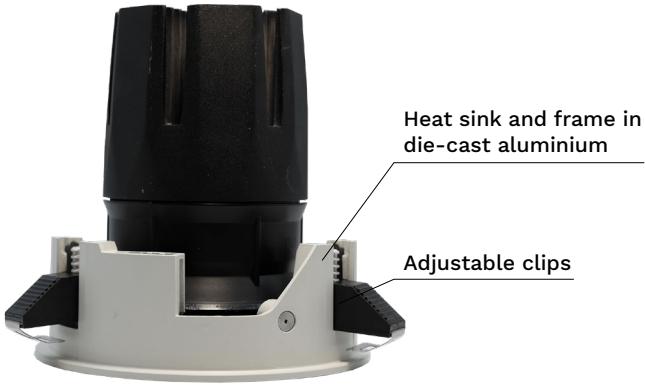

# D88 AXEL TRIMLESS


**FIXED**

**ADJUSTABLE**



Heat sink and frame in die-cast aluminium

Clips for plasterboard

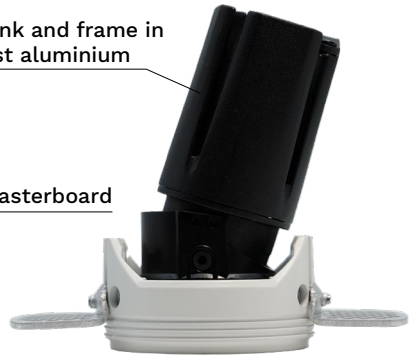

Reflector in technopolymer



Optical cut-off 30°

# D88 AXEL

## TYOLOGIES



Trim fixed & adjustable




Trimless fixed & adjustable




Wall washer

## SIZES


### Trim

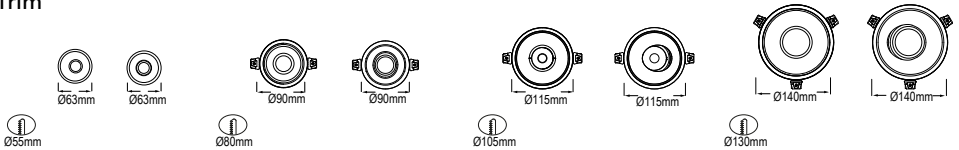


### Trimless

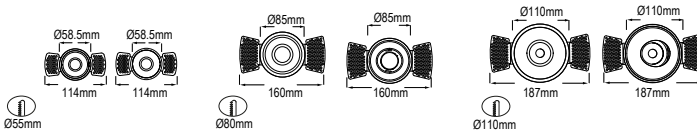

### Wall washer



## ACCESSORIES\*

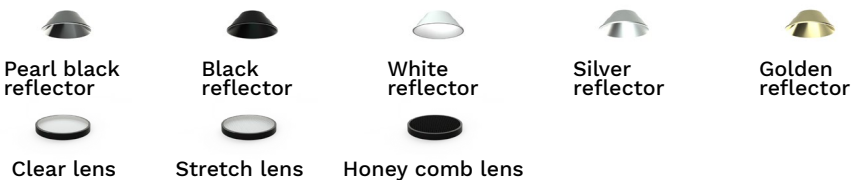


\* Pearl black reflector included as standard  
Check our website for accessories codes depending on product code




## BEAMS




Narrow




Medium




Wide



Diffused



Wall washer



## TECHNICAL SPECS

IP20 | IP44 | IK00  
 Insulation class III  
 CRI>90  
 6W - 35W  
 300 - 3300lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D88 /	FT	55	-	3L	927	NB	-	LW
Family	Version	Size		Class + Voltage	CRI° + K	Beam		Finish
D88 = Axel	FT = fixed trim FL = fixed trimless AT = adjustable trim AL = adjustable trimless	55 = cut-out Ø55 60 = cut-out Ø60 80 = cut-out Ø80 85 = cut-out Ø85 105 = cut-out Ø105 110 = cut-out Ø110 130 = cut-out Ø130		3L = class III low power 3H = class III high power  (Remote driver not included***)	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	NB = narrow MB = medium WB = wide DB = diffused WW = wall washer**		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\*\* Axel trimless Ø85 fixed and Axel trim Ø80 fixed only

\*\*\* Driver on-off or DALI is mandatory and to be ordered separately.

Driver phase-out on request.

Check our website for drivers codes depending on product code.


# D87 AXEL IP65

Axel is a family of downlights for recessed ceilings, in the indoor version or for damp environments. The wide range of sizes, powers and optics satisfy every application need in a professional way. The Axel spotlight is easy to install and can be mounted on 5-20 mm thick panels, available in the fixed or adjustable, trim or trimless version.

Axel è una famiglia di downlight per incasso a soffito, in versione da interno o per ambienti umidi. La vasta gamma di misure, potenze e ottiche soddisfano, in modo professionale, ogni esigenza applicativa. Il faretto Axel è di semplice installazione e può essere montato su pannelli di spessore 5-20 mm, disponibile in versione fixed o adjustable, trim o trimless.



# D87 AXEL IP65

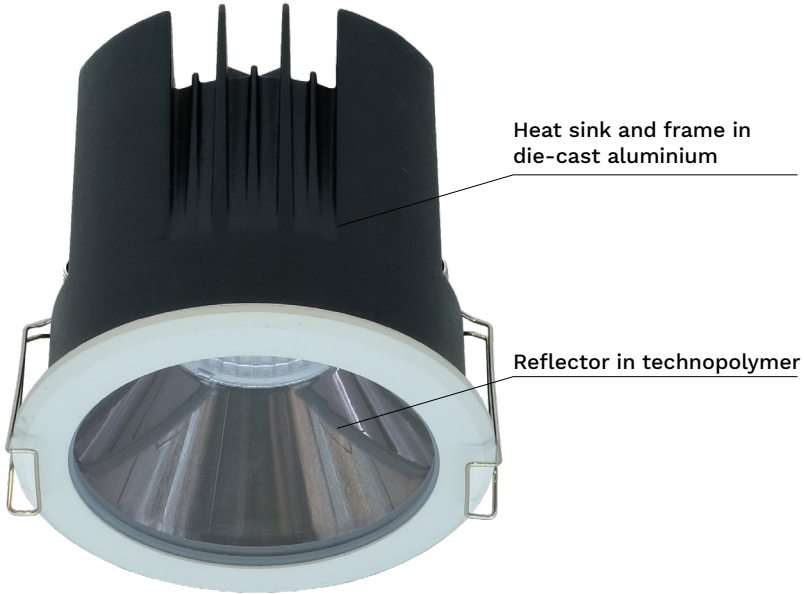

**CABLE ENTRY**



Cable gland to protect cables from external agents (dust and water) and to guarantee IP65 standard



Reflector in technopolymer

Clips for recessed installation

# D87 AXEL IP65

## SIZES

---






Ø55



Ø75



Ø95



## BEAMS



Narrow



Medium



Wide

## TECHNICAL SPECS

IP65 | IK02  
 Insulation class III  
 CRI>90  
 9W - 25W  
 720 - 2125lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D87	/	55	-	3	927	NB	-	LW
Family		Size		Class + Voltage	CRI° + K	Beam		Finish
D87 = Axel IP65		55 = cut-out Ø55 75 = cut-out Ø75 95 = cut-out Ø95		3 = class III  (Remote driver not included*)	927 = CRI>90 - 2700K 930 = CRI>90 - 3000K 940 = CRI>90 - 4000K	NB = narrow MB = medium WB = wide		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\* Driver on-off or DALI is mandatory and to be ordered separately.  
 Driver phase-cut on request.  
 Check our website for drivers codes depending on product code.

# D91C EIDOS CEILING


Eidos is an ultra-compact projector with a high technological profile, which can be wall-mounted, suspended or in the track version. The wide range of optics and various accessories guarantee precise, high-efficiency beams, offering the possibility of installing Eidos in many different contexts. Available in zoommable version to adjust the beam opening from 15° to 55°.

Eidos è un proiettore ultra compatto ad alto profilo tecnologico, che può essere montato a parete, sospeso o in versione track. L'ampia gamma di ottiche e diversi accessori, garantiscono fasci precisi, ad alte efficienze, offrendo la possibilità di installare Eidos in molteplici contesti diversi. Disponibile in versione zoommable per regolare l'apertura del fascio da 15° a 55°.






# D91C EIDOS CEILING

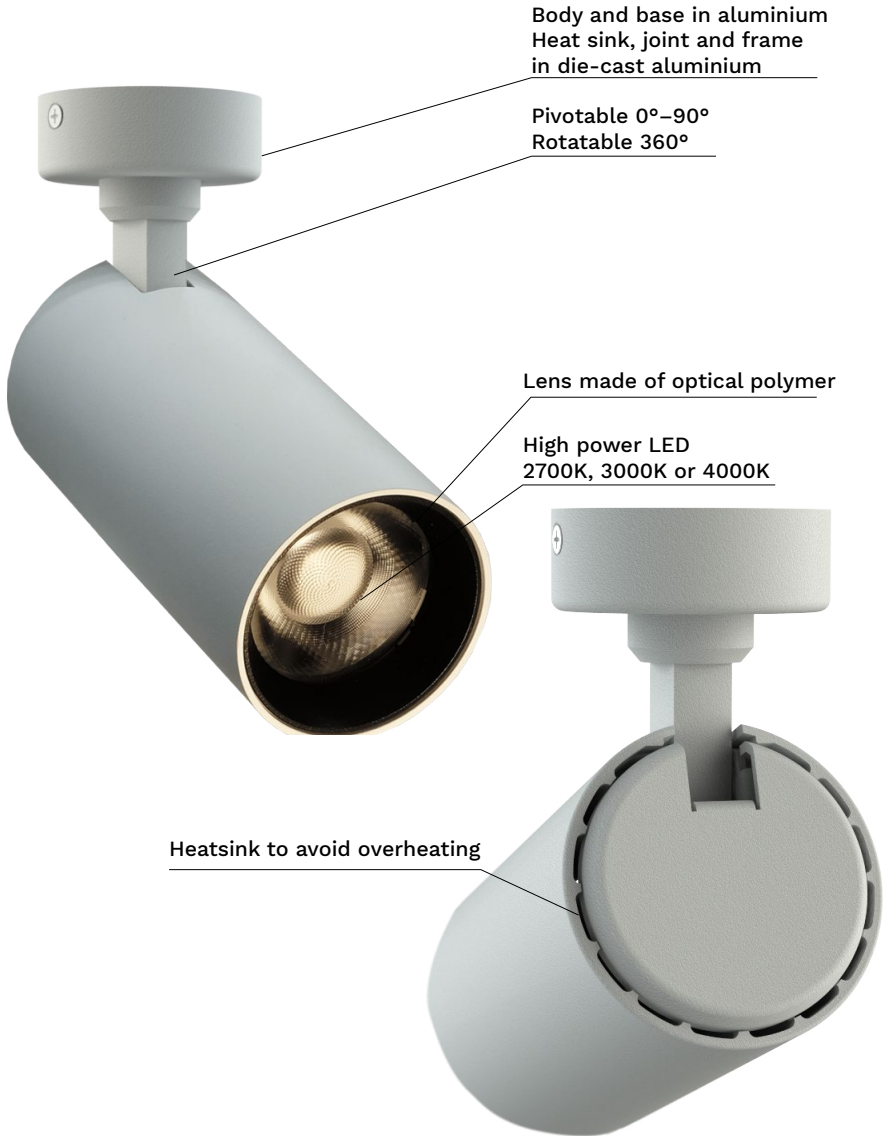

## ZOOM SPOTLIGHT

The light beam can be adjusted from 15° to 55° by simply turning the lens. Suitable for spaces with changing exhibits and merchandise.

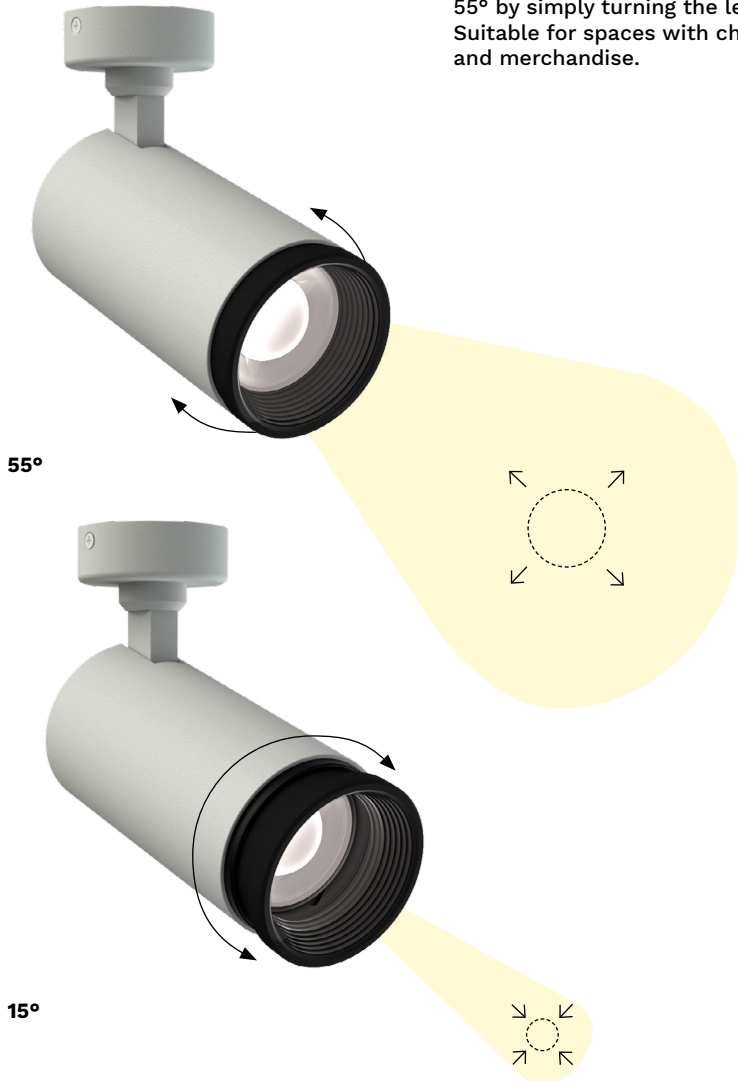

# D91C EIDOS CEILING

## SIZES

---



Ø35 x 85



Ø45 x 105



Ø55 x 125



Ø65 x 135  
Ø65 x 165



Ø75 x 165



Ø85 x 175



Zoom  
Ø65 x 133



Zoom  
Ø75 x 153



Zoom  
Ø85 x 160

## ACCESSORIES\*

---



Clear lens



Stretch lens





Honey comb lens





Visor

\* Check our website for accessories codes depending on product code



## BEAMS





Very narrow





Narrow





Medium



Wide



Very wide



Adjustable  
zoom

## TECHNICAL SPECS

IP20 | IK00  
 Insulation class III  
 CRI>90  
 3W - 40W  
 195 - 3800lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D91/C	35	-	3L	927	SN	-	LW
Family	Size		Class + Voltage	CRI° + K	Beam		Finish
D91/C = Eidos ceiling	35 = Ø35 45 = Ø45 55 = Ø55 65 = Ø65 75 = Ø75 85 = Ø85		3L = class III low power 3H = class III high power  (Remote driver not included***)	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	SN = super narrow NB = narrow MB = medium WB = wide VW = very wide ZB = adjustable zoom**		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\*\* Zoom versions Ø65, Ø75, Ø85 only

\*\*\* Driver on-off or DALI is mandatory and to be ordered separately.

Driver phase-cut on request.

Check our website for drivers codes depending on product code.

# D91R EIDOS RECESSED


Eidos is an ultra-compact projector with a high technological profile, which can be wall-mounted, suspended or in the track version. The wide range of optics and various accessories guarantee precise, high-efficiency beams, offering the possibility of installing Eidos in many different contexts. Available in zoommable version to adjust the beam opening from 15° to 55°.

Eidos è un proiettore ultra compatto ad alto profilo tecnologico, che può essere montato a parete, sospeso o in versione track. L'ampia gamma di ottiche e diversi accessori, garantiscono fasci precisi, ad alte efficienze, offrendo la possibilità di installare Eidos in molteplici contesti diversi. Disponibile in versione zoommable per regolare l'apertura del fascio da 15° a 55°.



VIA LARGA SHOWROOM, MILAN


# D91R EIDOS RECESSED

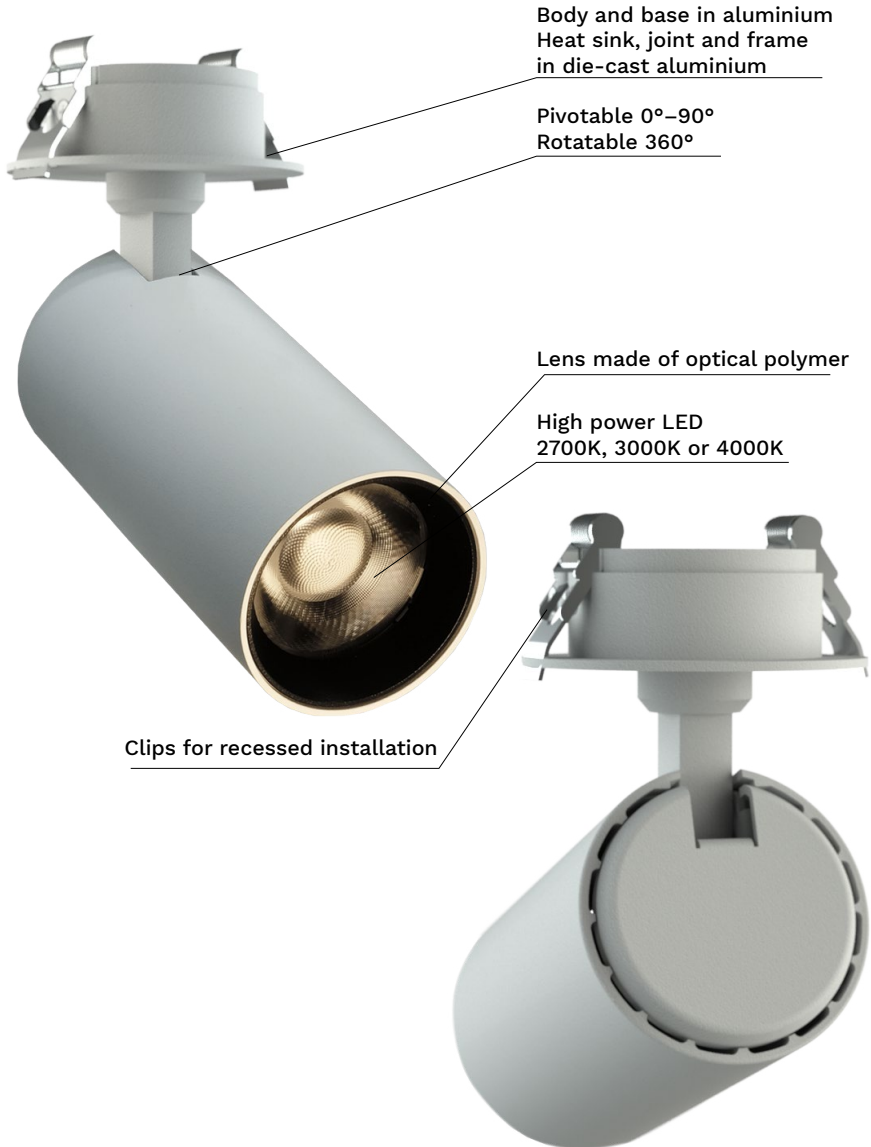



## ZOOM SPOTLIGHT

The light beam can be adjusted from 15° to 55° by simply turning the lens. Suitable for spaces with changing exhibits and merchandise.

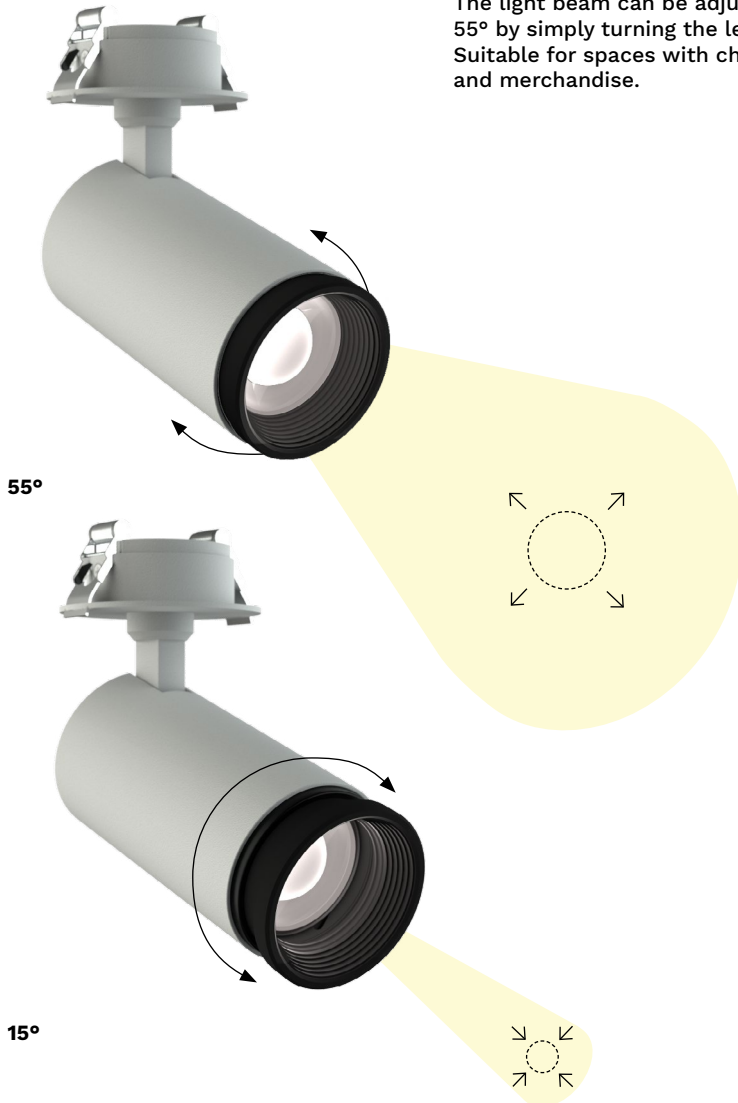

# D91R EIDOS RECESSED

## SIZES

---



Ø35 x 85



Ø45 x 105



Ø55 x 125



Ø65 x 135  
Ø65 x 165



Ø75 x 165



Ø85 x 175



Zoom  
Ø65 x 133



Zoom  
Ø75 x 153



Zoom  
Ø85 x 160

## ACCESSORIES\*

---



Clear lens



Stretch lens





Honey comb lens





Visor

\* Check our website for accessories codes depending on product code



## BEAMS





Very narrow





Narrow






Medium



Wide



Very wide



Adjustable  
zoom

## TECHNICAL SPECS

IP20 | IK00  
 Insulation class III  
 CRI>90  
 3W - 40W  
 195 - 3800lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D91/R	35	-	3L	927	SN	-	LW
Family	Size		Class + Voltage	CRI° + K	Beam		Finish
D91/R = Eidos recessed	35 = Ø35 45 = Ø45 55 = Ø55 65 = Ø65 75 = Ø75 85 = Ø85		3L = class III low power 3H = class III high power  (Remote driver not included***)	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	SN = super narrow NB = narrow MB = medium WB = wide VW = very wide ZB = adjustable zoom**		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\*\* Zoom versions Ø65, Ø75, Ø85 only

\*\*\* Driver on-off or DALI is mandatory and to be ordered separately.

Driver phase-cut on request.

Check our website for drivers codes depending on product code.


# D92C EIDOS PENDANT CEILING


Eidos is an ultra-compact projector with a high technological profile, which can be wall-mounted, suspended or in the track version. The wide range of optics and various accessories guarantee precise, high-efficiency beams, offering the possibility of installing Eidos in many different contexts. Available in zoommable version to adjust the beam opening from 15° to 55°.

Eidos è un proiettore ultra compatto ad alto profilo tecnologico, che può essere montato a parete, sospeso o in versione track. L'ampia gamma di ottiche e diversi accessori, garantiscono fasci precisi, ad alte efficienze, offrendo la possibilità di installare Eidos in molteplici contesti diversi. Disponibile in versione zoommable per regolare l'apertura del fascio da 15° a 55°.



# D92C EIDOS PENDANT CEILING

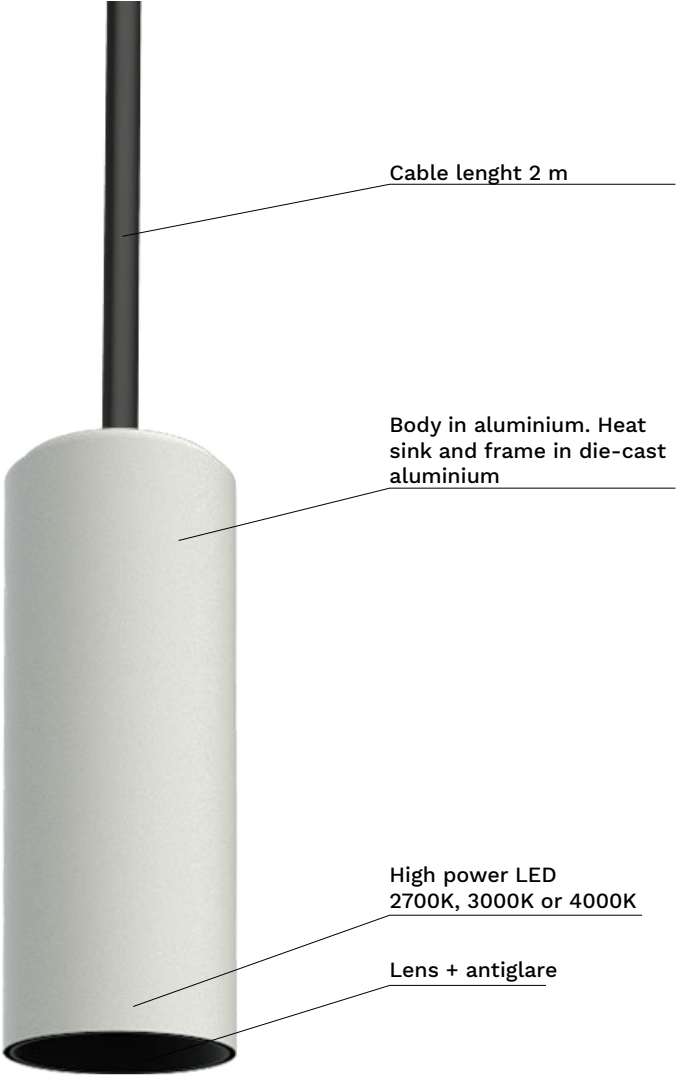

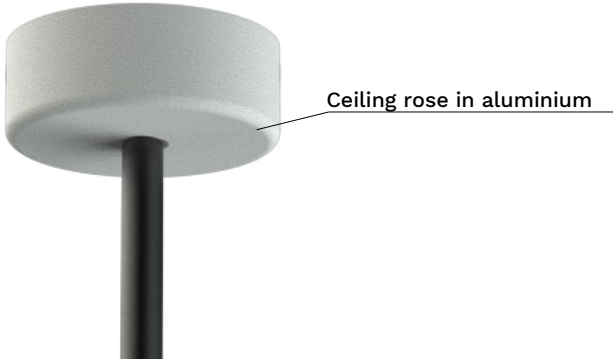

# D92C EIDOS PENDANT CEILING

## SIZES

---



Ø35 x 85



Ø45 x 105



Ø55 x 125



Ø65 x 135  
Ø65 x 165



Ø75 x 165



Ø85 x 175

## ACCESSORIES\*

---



Clear lens



Stretch lens



Honey comb lens




Visor


\* Check our website for accessories codes depending on product code




## BEAMS




Very narrow




Narrow



Medium



Wide



Very wide

## TECHNICAL SPECS

IP20 | IK00  
 Insulation class III  
 CRI>90  
 3W - 40W  
 195 - 3800lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D92/C	35	-	3L	927	SN	-	LW
Family	Size		Class + Voltage	CRI° + K	Beam		Finish
D92/C = Eidos pendant ceiling	35 = Ø35 45 = Ø45 55 = Ø55 65 = Ø65 75 = Ø75 85 = Ø85		3L = class III low power 3H = class III high power  (Remote driver not included**)	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	SN = super narrow NB = narrow MB = medium WB = wide VW = very wide		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\*\* Driver on-off or DALI is mandatory and to be ordered separately.  
 Driver phase-cut on request.  
 Check our website for drivers codes depending on product code.

# D92R EIDOS PENDANT RECESSED


Eidos is an ultra-compact projector with a high technological profile, which can be wall-mounted, suspended or in the track version. The wide range of optics and various accessories guarantee precise, high-efficiency beams, offering the possibility of installing Eidos in many different contexts. Available in zoommable version to adjust the beam opening from 15° to 55°.


Eidos è un proiettore ultra compatto ad alto profilo tecnologico, che può essere montato a parete, sospeso o in versione track. L'ampia gamma di ottiche e diversi accessori, garantiscono fasci precisi, ad alte efficienze, offrendo la possibilità di installare Eidos in molteplici contesti diversi. Disponibile in versione zoommable per regolare l'apertura del fascio da 15° a 55°.



VIA LARGA SHOWROOM, MILAN

# D92R EIDOS PENDANT RECESSED

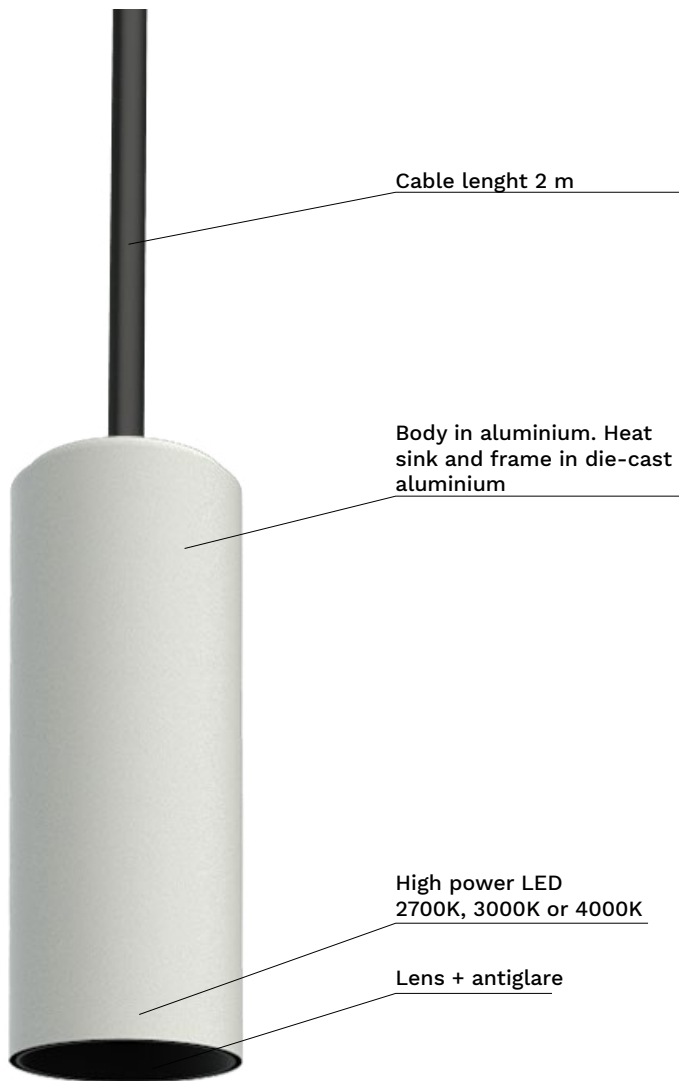

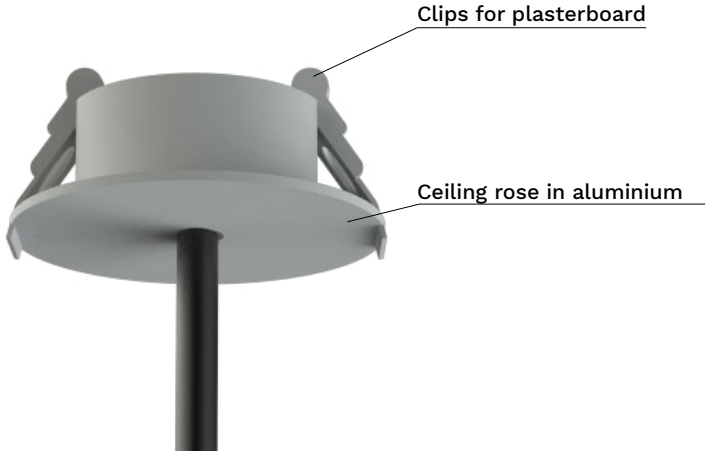

Heatsink to avoid overheating



# D92R EIDOS PENDANT RECESSED

## SIZES

---



Ø35 x 85



Ø45 x 105



Ø55 x 125



Ø65 x 135  
Ø65 x 165



Ø75 x 165



Ø85 x 175

## ACCESSORIES\*

---



Clear lens



Stretch lens




Honey comb lens





Visor

\* Check our website for accessories codes depending on product code



## BEAMS




Very narrow





Narrow



Medium



Wide



Very wide

## TECHNICAL SPECS

IP20 | IK00  
 Insulation class III  
 CRI>90  
 3W - 40W  
 195 - 3800lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D92/R	35	-	3L	927	SN	-	LW
Family	Size		Class + Voltage	CRI* + K	Beam		Finish
D92/R = Eidos pendant recessed	35 = Ø35 45 = Ø45 55 = Ø55 65 = Ø65 75 = Ø75 85 = Ø85		3L = class III low power 3H = class III high power  (Remote driver not included**)	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	SN = super narrow NB = narrow MB = medium WB = wide VW = very wide		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\*\* Driver on-off or DALI is mandatory and to be ordered separately.  
 Driver phase-cut on request.  
 Check our website for drivers codes depending on product code.

# D90 EIDOS TRACK 48V

Eidos is an ultra-compact projector with a high technological profile, which can be wall-mounted, suspended or in the track version. The wide range of optics and various accessories guarantee precise, high-efficiency beams, offering the possibility of installing Eidos in many different contexts. Available in zoommable version to adjust the beam opening from 15° to 55°.


Eidos è un proiettore ultra compatto ad alto profilo tecnologico, che può essere montato a parete, sospeso o in versione track. L'ampia gamma di ottiche e diversi accessori, garantiscono fasci precisi, ad alte efficienze, offrendo la possibilità di installare Eidos in molteplici contesti diversi. Disponibile in versione zoommable per regolare l'apertura del fascio da 15° a 55°.






LANEROSI SHOWROOM, MILAN

# D90 EIDOS TRACK 48V

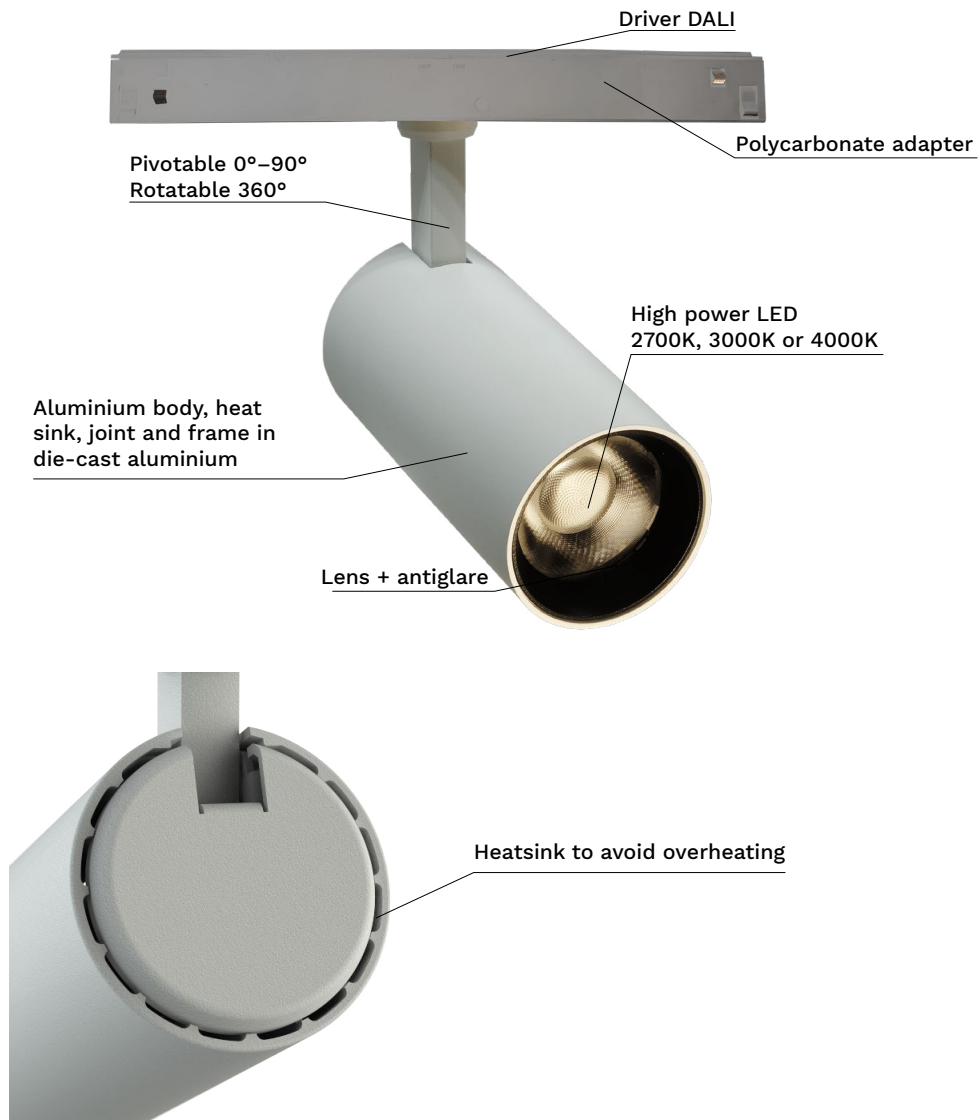

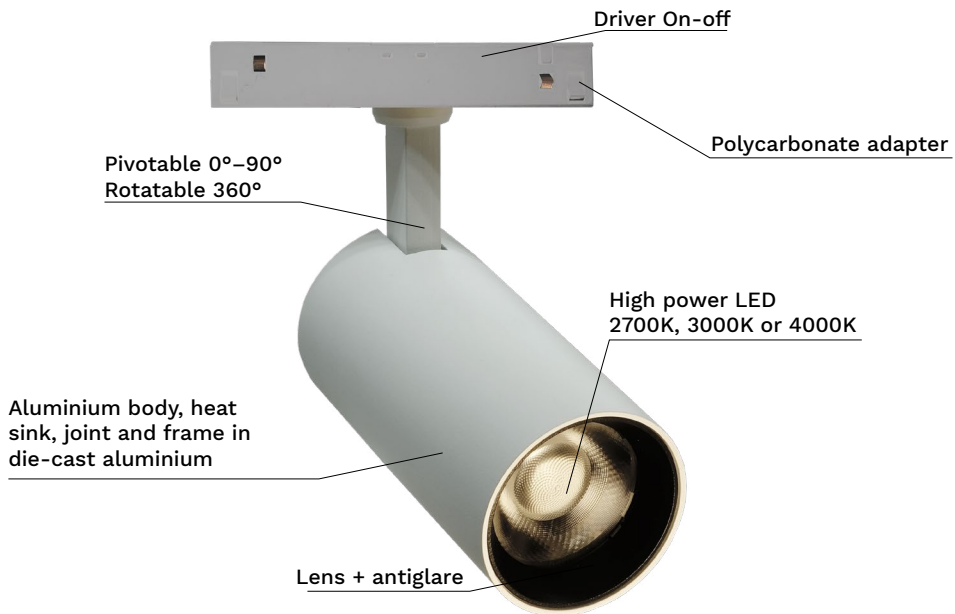

# D90 EIDOS TRACK 48V

## SIZES

---



Ø35 x 85



Ø45 x 105



Ø55 x 125



Ø65 x 135  
Ø65 x 165



Ø75 x 165

## ACCESSORIES\*

---



Clear lens



Stretch lens





Honey comb lens





Visor

\* Check our website for accessories codes depending on product code



## BEAMS





Very narrow





Narrow



Medium



Wide



Very wide

## TECHNICAL SPECS

IP20 | IK00  
 Insulation class III  
 CRI>90  
 3W - 30W  
 195 - 2850lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D90	35	-	3L	EL	927	SN	-	LW
Family	Size		Class + Voltage	Ballast type	CRI° + K	Beam		Finish
D90 = Eidos track 48V	35 = Ø35 45 = Ø45 55 = Ø55 65 = Ø65 75 = Ø75		3L = class III low power 3H = class III high power  (48V driver included)	EL = On-off DA = DALI	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	SN = super narrow NB = narrow MB = medium WB = wide VW = very wide		LW = embossed white RAL 9010 LB = embossed black RAL 9005


# D89 EIDOS TRACK 220V

Eidos is an ultra-compact projector with a high technological profile, which can be wall-mounted, suspended or in the track version. The wide range of optics and various accessories guarantee precise, high-efficiency beams, offering the possibility of installing Eidos in many different contexts. Available in zoommable version to adjust the beam opening from 15° to 55°.


Eidos è un proiettore ultra compatto ad alto profilo tecnologico, che può essere montato a parete, sospeso o in versione track. L'ampia gamma di ottiche e diversi accessori, garantiscono fasci precisi, ad alte efficienze, offrendo la possibilità di installare Eidos in molteplici contesti diversi. Disponibile in versione zoommable per regolare l'apertura del fascio da 15° a 55°.




# D89 EIDOS TRACK 220V

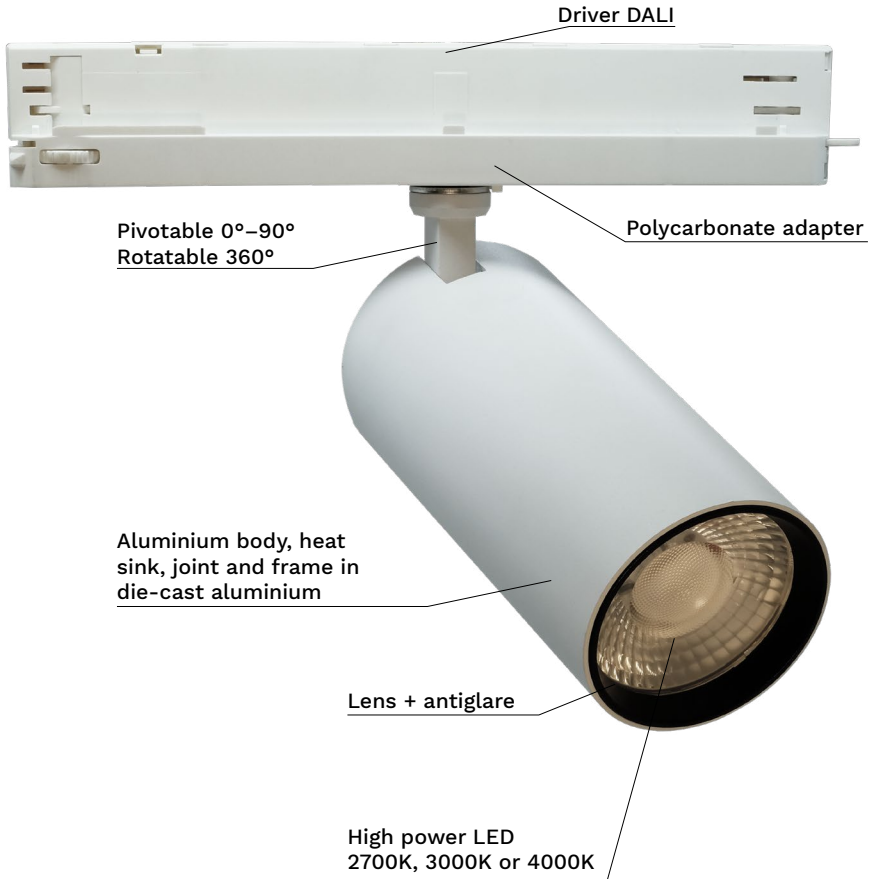



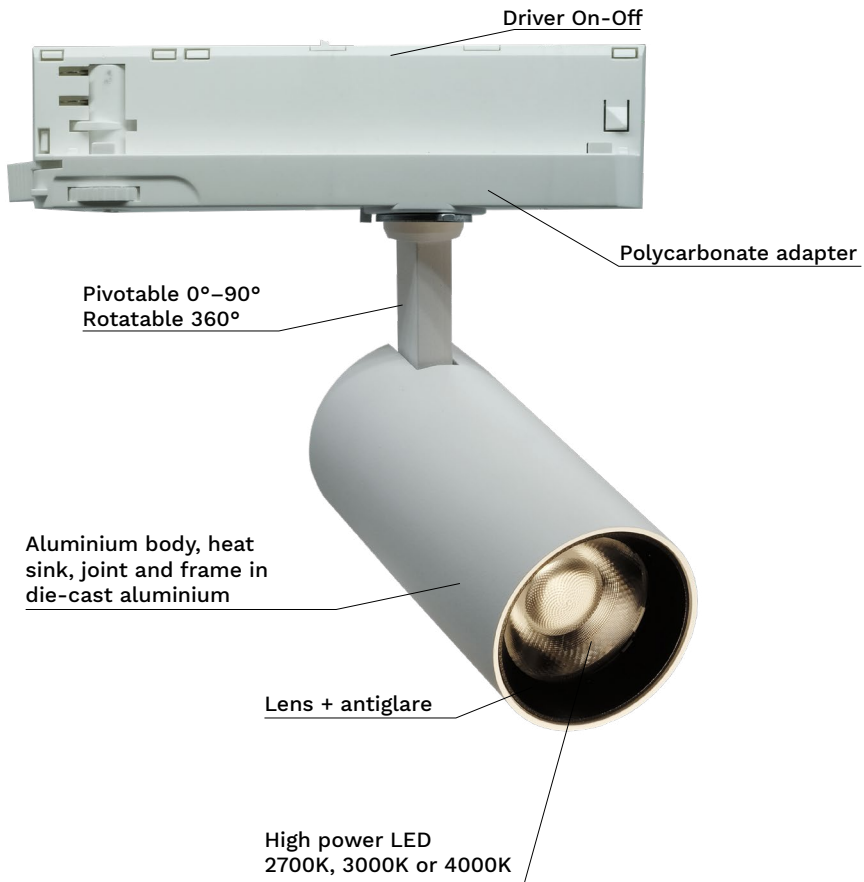


# D89 EIDOS TRACK 220V

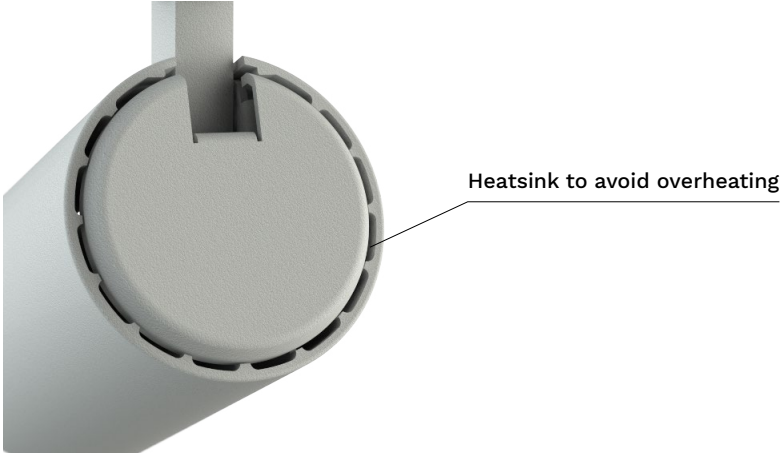

## ZOOM SPOTLIGHT

The light beam can be adjusted from 15° to 55° by simply turning the lens. Suitable for spaces with changing exhibits and merchandise.

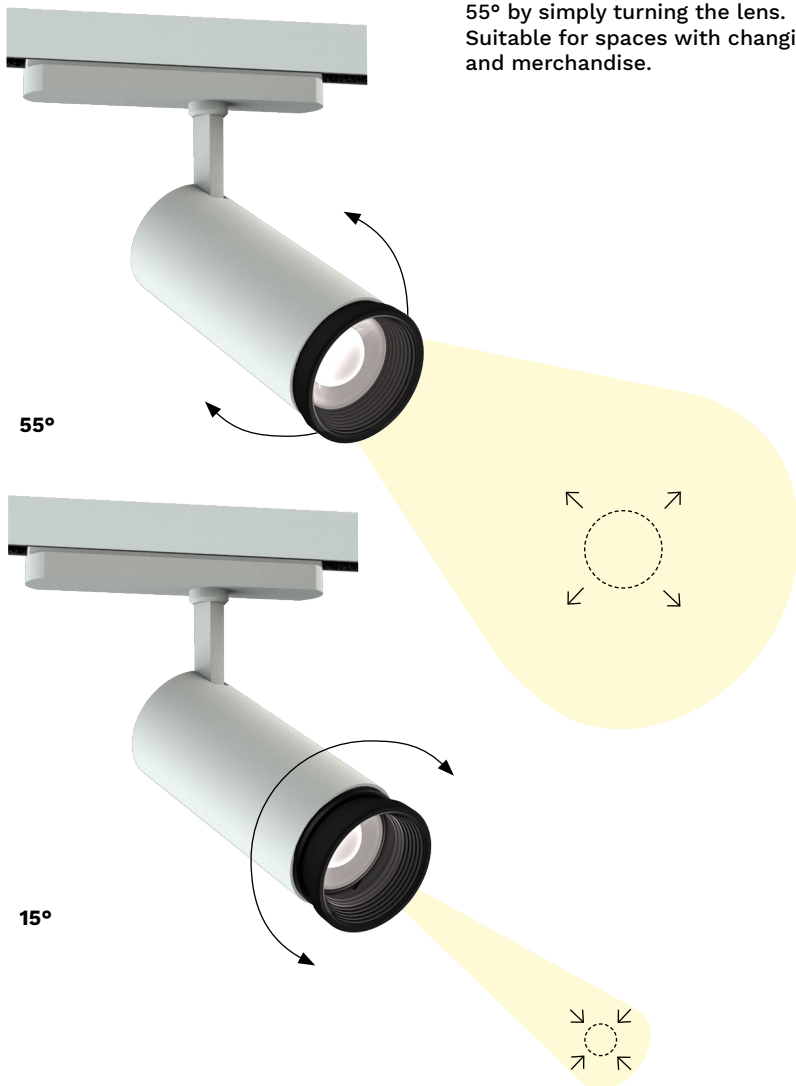

# D89 EIDOS TRACK 220V

## SIZES

---




Ø35 x 85



Ø45 x 105



Ø55 x 125



Ø65 x 135  
Ø65 x 165



Ø75 x 165



Ø85 x 175



Zoom  
Ø65 x 133



Zoom  
Ø75 x 153



Zoom  
Ø85 x 160

## ACCESSORIES\*

---



Clear lens



Stretch lens





Honey comb lens





Visor

\* Check our website for accessories codes depending on product code



## BEAMS





Very narrow





Narrow






Medium



Wide



Very wide



Adjustable  
zoom

## TECHNICAL SPECS

IP20 | IK00  
 Insultaion class II  
 CRI>90  
 3W - 40W  
 195 - 3800lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D89	35	-	2L	EL	927	SN	-	LW
Family	Size		Class + Voltage	Ballast type	CRI° + K	Beam		Finish
D89 = Eidos track 220V	35 = Ø35 45 = Ø45 55 = Ø55 65 = Ø65 75 = Ø75 85 = Ø85		2L = class II low power 2H = class II high power	EL = On-off DA = DALI	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	SN = super narrow NB = narrow MB = medium WB = wide VW = very wide ZB = adjustable zoom**		LW = embossed white RAL 9010 LB = embossed black RAL 9005

\*\* Zoom versions Ø65, Ø75, Ø85 only

# D81 S-LINE TRACK 220V

S-Line is an ultra compact linear product with high technological characteristics; with S-Line offices and open spaces become exciting and efficient working areas. The optical system with dedicated lenses grants the best visual comfort.

S-Line è un prodotto lineare ultracompatto ad alto profilo tecnologico, sviluppato per trasformare uffici ed open space in luoghi di lavoro stimolanti ed efficienti. Il sistema ottico con lenti dedicate, garantisce il massimo comfort visivo.



# D81 S-LINE TRACK 220V

**FULL ROTATION**  
Pivotable 0°–90°



**0°**

Housing made of extruded aluminium powder-coated.  
Polycarbonate adapter.




Ultra compact linear product




**90°**



The optic or opal optical system allows 9 different light distributions. Suitable for the best visual comfort in any space.

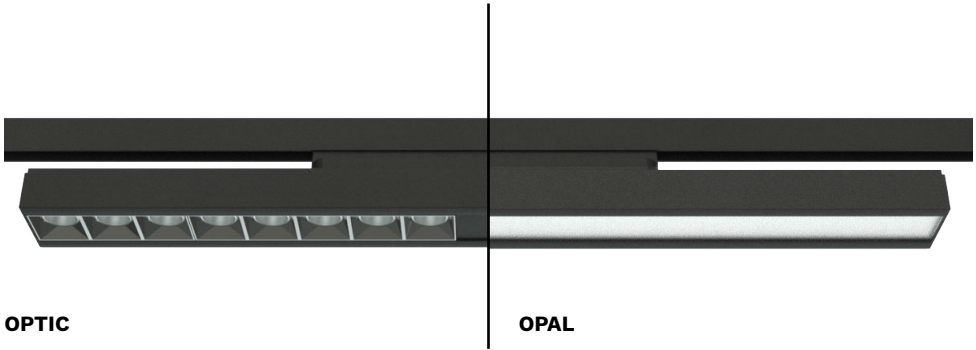

### LIGHT DISTRIBUTION

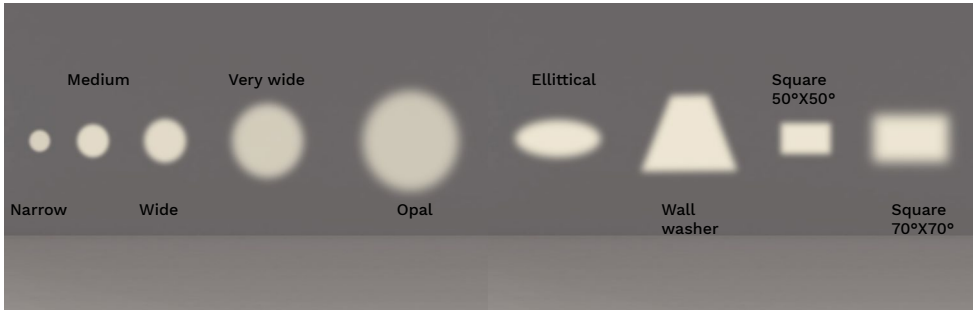

# D81 S-LINE TRACK 220V

## OPAL

---



L=660mm  
61 (W) x 76 (H) mm



L=1190mm  
61 (W) x 76 (H) mm

## OPTIC

---



L=660mm  
61 (W) x 76 (H) mm



L=1190mm  
61 (W) x 76 (H) mm

## BEAMS



Narrow



Medium



Wide



Very wide



Square 50°X50°



Square 70°X70°



Elliptical



Wall washer

## TECHNICAL SPECS

IP20 | IK00  
 Insulation class II  
 CRI>90  
 20W - 40W  
 1500 - 4400lm  
 2700K - 3000K - 4000K

## PRODUCT CODES

D81	/	US	-	2L	EL	927	NB	-	LB
Family	Size + Version	Class + Voltage	Ballast type	CRI° + K	Beam	Finish			
D81 = S-Line	US = optics - L=660 UL = optics - L=1190 OS = opal - L=660 OL = opal - L=1190	2L = class II low power 2H = class II high power	EL = On-off DA = DALI	927 = CRI>90 2700K 930 = CRI>90 3000K 940 = CRI>90 4000K	NB = narrow MB = medium WB = wide VW = very wide S5 = square 50°X50° S7 = square 70°X70° EB = elliptical WW = wall washer FE = super diffuse	LB = embossed black RAL 9005 LW = embossed white RAL 9010			



IS PART OF





