

istruzioni di montaggio - manutenzione

CHIARO Ø60 LED IP66

NOTA BENE: le presenti istruzioni di montaggio informano l'utilizzatore sulle corrette modalità di manutenzione e ricambio delle lampade. E' vietata qualsiasi manomissione e/o trasformazione dell'apparecchio che deve essere installato ed utilizzato così come fornito ed in conformità delle Norme Impianti Nazionali. Installazioni non conformi fanno decadere ogni forma di garanzia, l'azienda non risponde dei danni causati da un errato montaggio. L'INSTALLAZIONE DEVE ESSERE EFFETTUATA DA PERSONALE QUALIFICATO.

Controllo qualità: In caso di reclamo mettersi in contatto con la nostra azienda o con la nostra organizzazione di vendita citando l'ordine di acquisto e il numero di matricola che contrassegna l'apparecchio.

Vers.	L (mm)	HE (W)	HO (W)	INRUSH CURRENT
2x	650	15W	23W	40A
3x	930	22W	34W	
4x	1220	29W	45W	
5x	1500	37W	55W	


Versioni disponibili con Kit Emergenza		
Modello	Vers.	Potenza
CHIARO Ø60 LED	4x	29W
	5x	37W


Caratteristiche apparecchio e significato simboli in etichetta:

Risponde alle norme EN 60598-1, EN 60598-2-1

IP66 apparecchio totalmente protetto contro la polvere e contro getti potenti assimilabili alle ondate

 Classe I isolamento semplice : è richiesta la terra di protezione


 è vietato lo smaltimento come rifiuto urbano
è obbligatoria la raccolta separata a fine vita del prodotto
"Consorzio di appartenenza RAEE: Ecolight.
Registro Nazionale dei Produttori N°: IT0801000000166"



CORRETTA INSTALLAZIONE DEL PRODOTTO



CHIARO Ø60 LED_CABLAGGIO

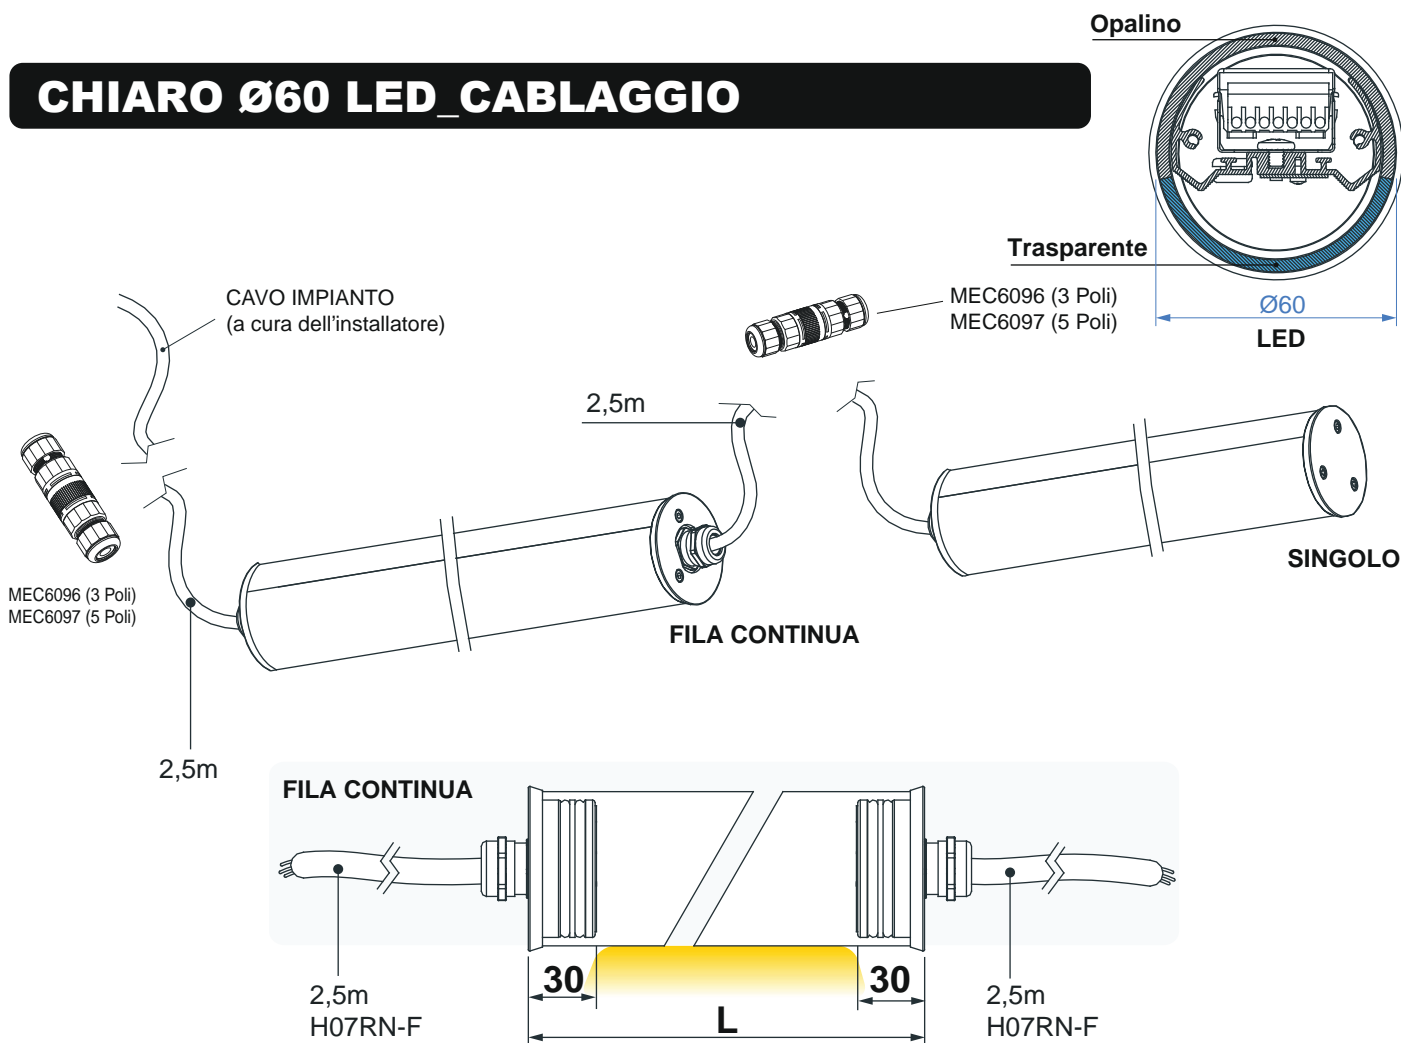


ATTENZIONE:
POTENZA MAX APPARECCHI COLLEGABILI IN SERIE



2300W



Controllo qualità: in caso di reclamo mettersi in contatto con la nostra azienda o con la nostra organizzazione di vendita citando l'ordine di acquisto e il numero di matricola che contrassegna l'apparecchio. / Le modifiche tecniche sono soggette a cambiamenti senza preavviso!

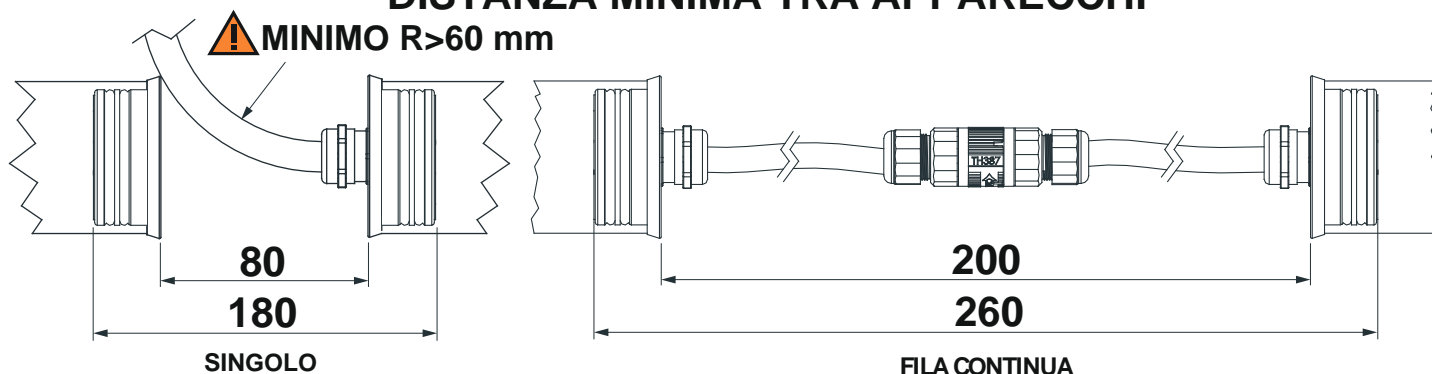CHIARO Ø60_ACCESSORI FISSAGGIO**DISTANZA MINIMA TRA APPARECCHI****FISSAGGIO A PLAFONE / PARETE / TERRA**


(Kit di installazione applicabili con flessibilità su tutta la lunghezza del tubo)

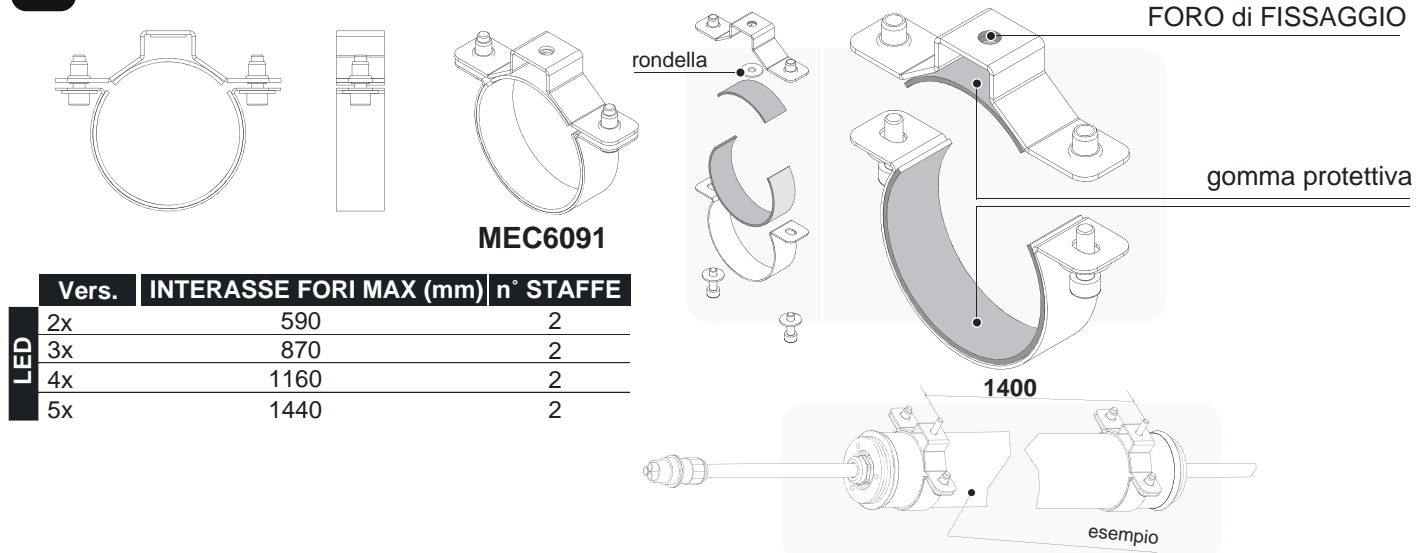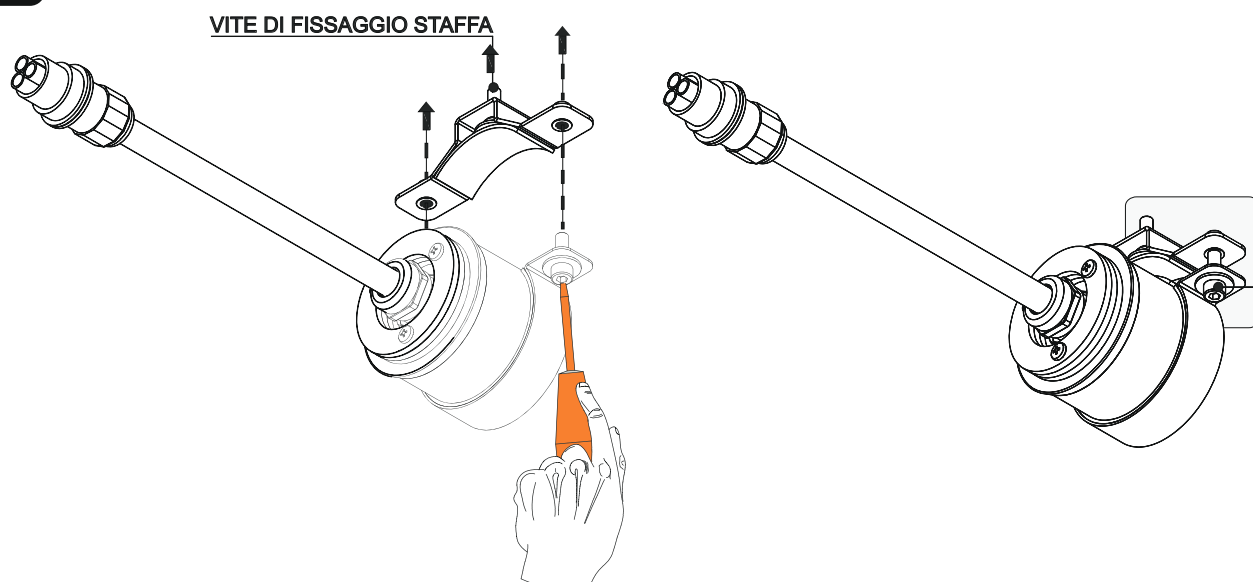1 REALIZZARE I FORI DI FISSAGGIO PER LE STAFFE DEI MODULI ILLUMINANTI**2 FISSARE I MODULI ILLUMINANTI SENZA SERRARE A FONDO LE VITI**


istruzioni di montaggio - manutenzione

CHIARO Ø60 LED IP66



FISSAGGIO A SOSPENSIONE

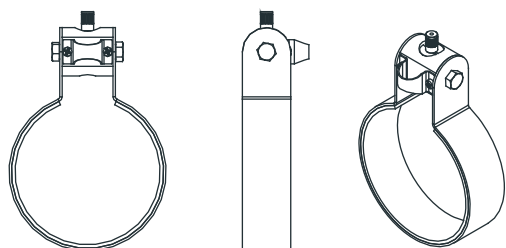



	Vers.	INTERASSE FORI MAX (mm)	n° STAFFE
LED	2x	590	2
	3x	870	2
	4x	1160	2
	5x	1440	2

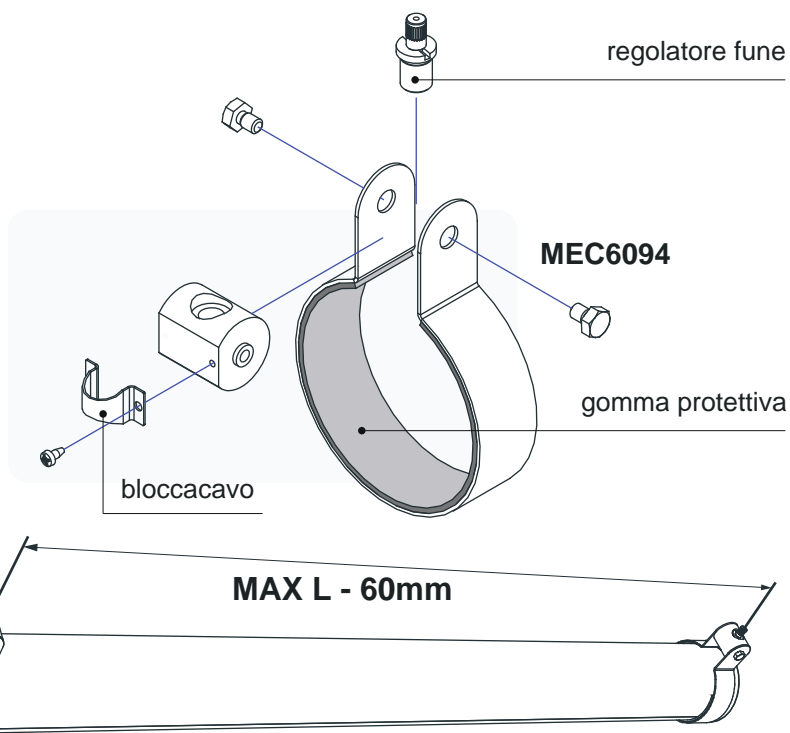

FISSAGGIO A PLAFONE / PARETE_50mm

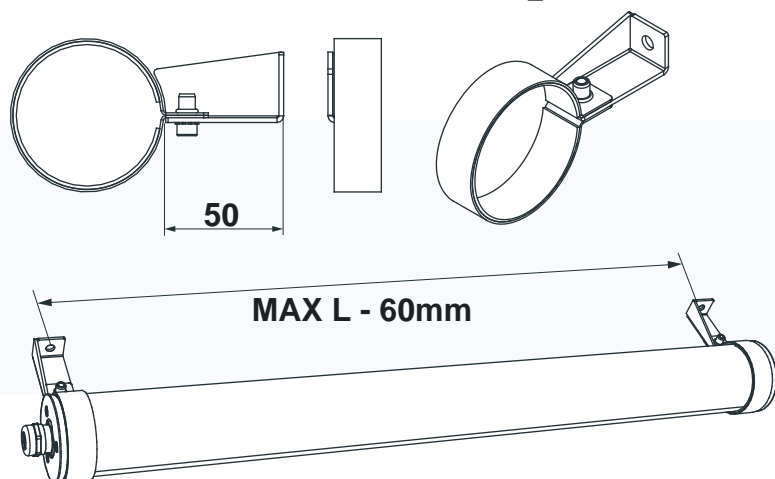

FISSAGGIO A PLAFONE / PARETE_100mm

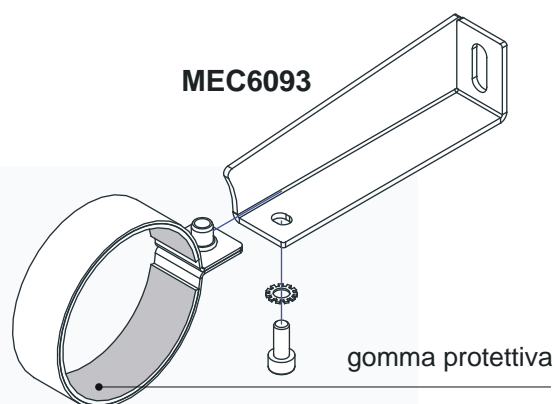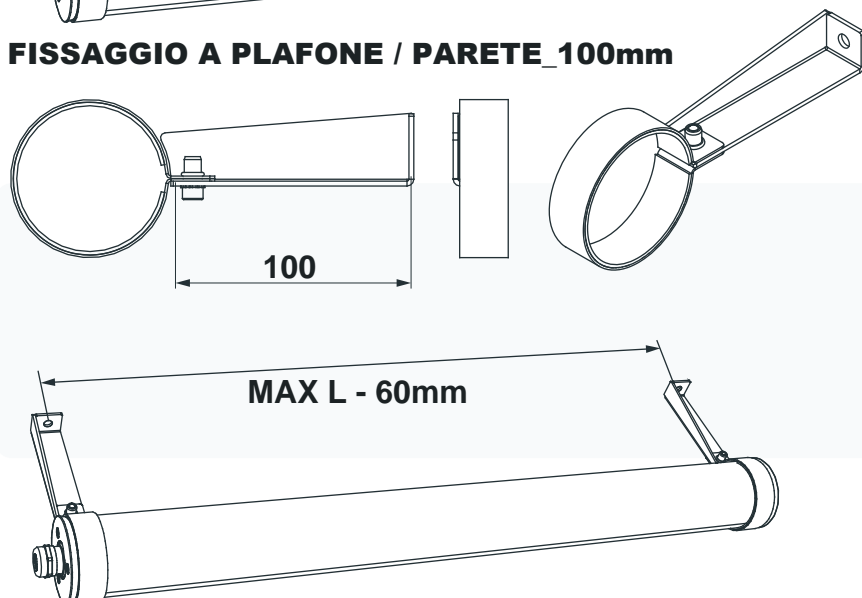

CHIARO Ø60_ACCESSORI ALIMENTAZIONE

CONNETTORI IP68 ACCESSORI



MEC6096_3 POLI

MEC6097_5 POLI


MEC6096_3 POLI

TH387

Versione perforazione isolante
Piercing terminals version
Code: THP.XXX.XXX

**3 POLI**


No sguainatura
No unsheathing

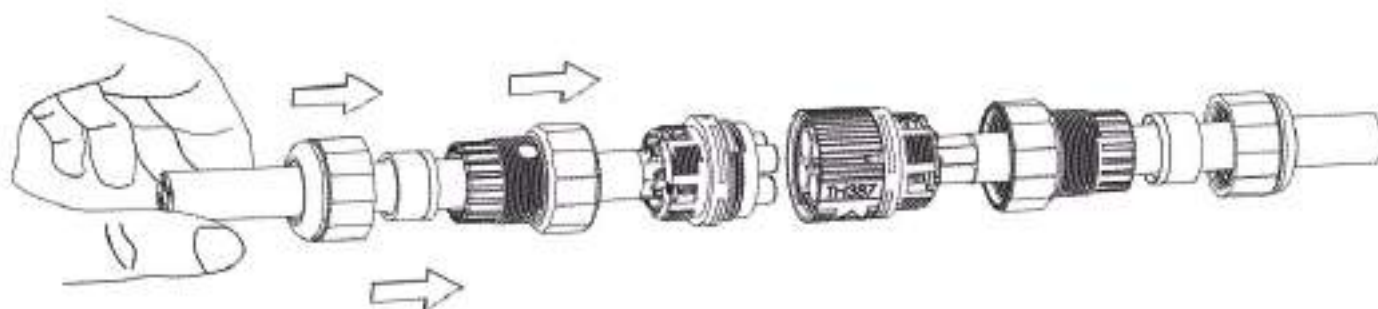


istruzioni di montaggio - manutenzione

CHIARO Ø60 LED IP66

MEC6097_5 POLI


TH387
2-3-4-5 POLES


1

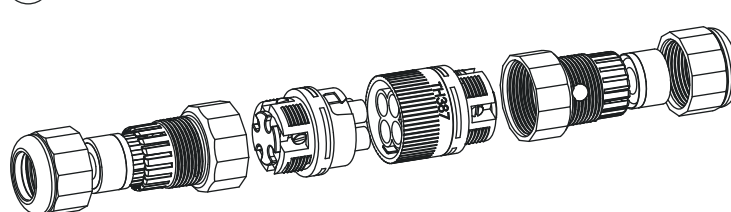


2



Ø 7.0 ÷ 9.0 mm



Ø 9.0 ÷ 12.0 mm




ADAPT. HOLE
Ø 9.0 mm

≤ Ø 6.0 ÷ 7.0 mm

3




Versione a vite standard

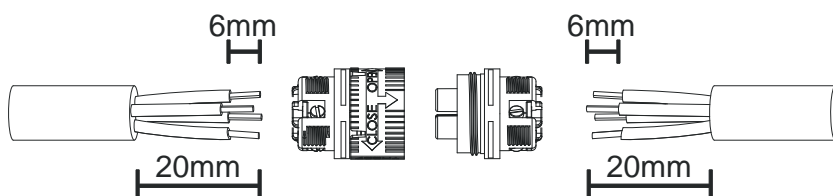


3.1

Versione perforazione isolante




No sguainatura

4

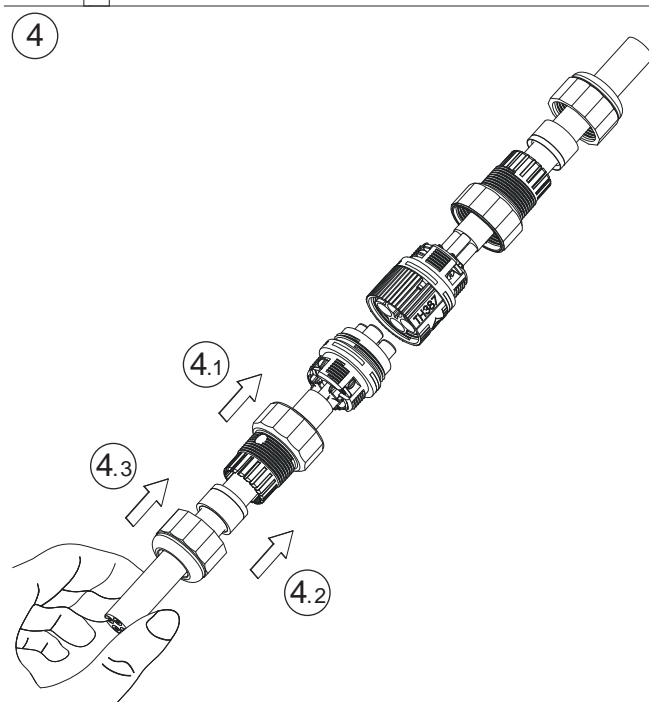

5

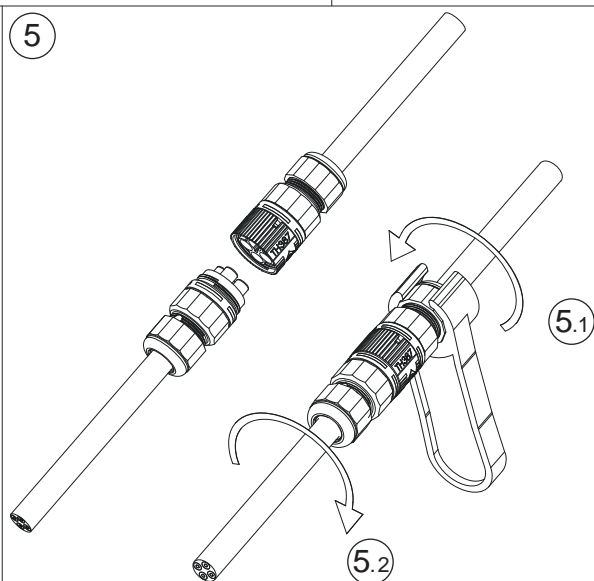

Chiave speciale di fissaggio rapido

installation and maintenance sheet

CHIARO Ø60 LED IP66

NB: These assembly instructions must be given to end users for correct maintenance and so that they know how to change the bulb. The appliance must not be tampered with or transformed and it must be installed and used as supplied and in compliance with the National Rules on Installations. Any non-compliant installations will invalidate all forms of guarantee. **THE COMPANY CANNOT BE HELD RESPONSIBLE FOR DAMAGE CAUSED BY INCORRECT ASSEMBLY.**

Quality control: In case of complaint please get in touch with our company or its sales organization. Please give the number of your order as well as the serial number that recognizes the fixture.

Vers.	L (mm)	HE (W)	HO (W)	INRUSH CURRENT
2x	650	15W	23W	40A
3x	930	22W	34W	
4x	1220	29W	45W	
5x	1500	37W	55W	

Available versions with Emergency Kit		
Model	Vers.	Power
CHIARO Ø60 LED	4x	29W
	5x	37W


Features and meaning of the symbols shown on the label:

According to EN 60598-1, EN 60598-2-1



IP66 totally dust-proof and water-proof on ships' decks

Class I simple insulation : earth required



disposing of as urban waste is forbidden, separate collection is mandatory when the product is at the end of its life



CORRECT MOUNTING TYPES

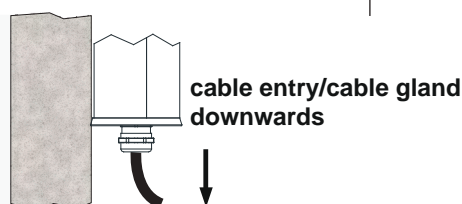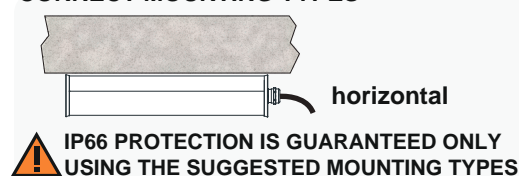

CHIARO Ø60 LED_WIRING

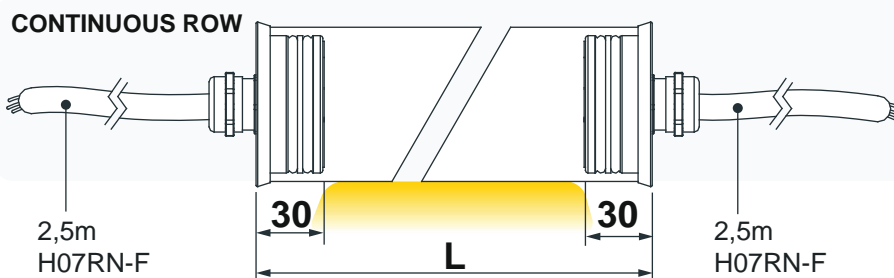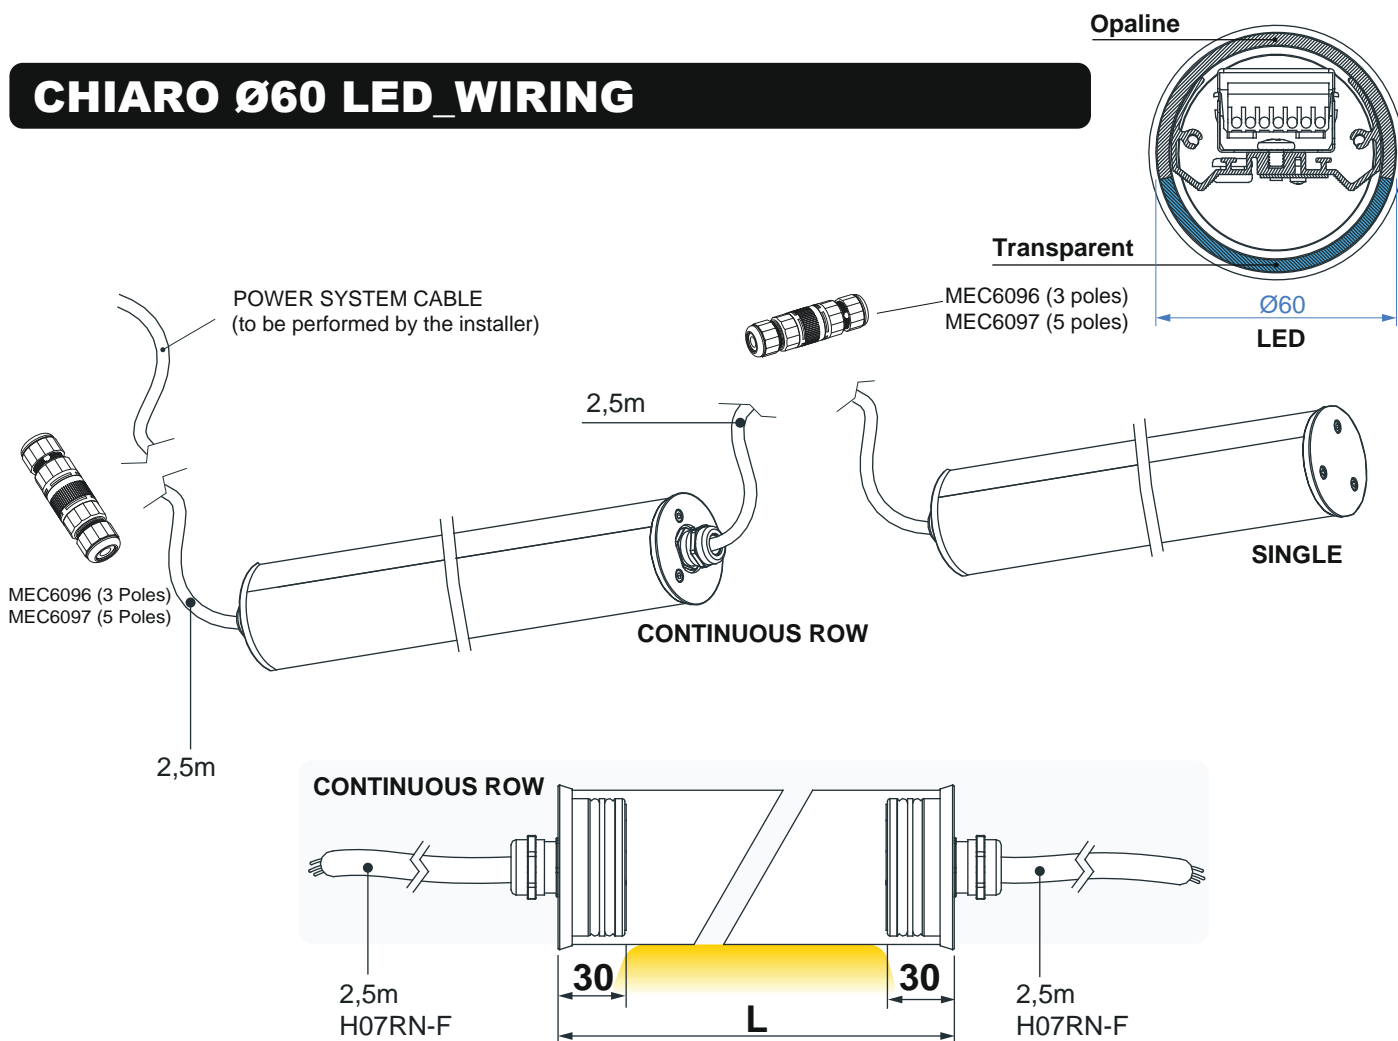


ATTENTION:
MAX FITTINGS POWER IN A SERIES CONNECTION



2300W



Quality control: In case of complaint please get in touch with our company or its sales organization. Please give the number of your order as well as the serial number that recognizes the fixture. / Specifications are subject to change without notice!

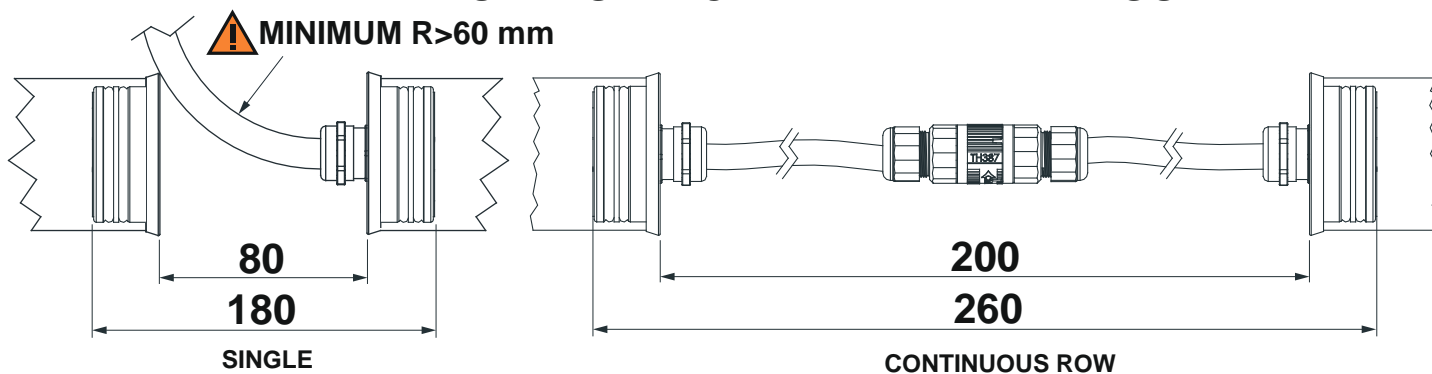
CHIARO Ø60_MOUNTING ACCESSORIES**MINIMUM DISTANCE BETWEEN FITTINGS****CEILING / WALL / FLOOR MOUNTING**

(Installation kits applicable flexibly along the entire length of the tube)

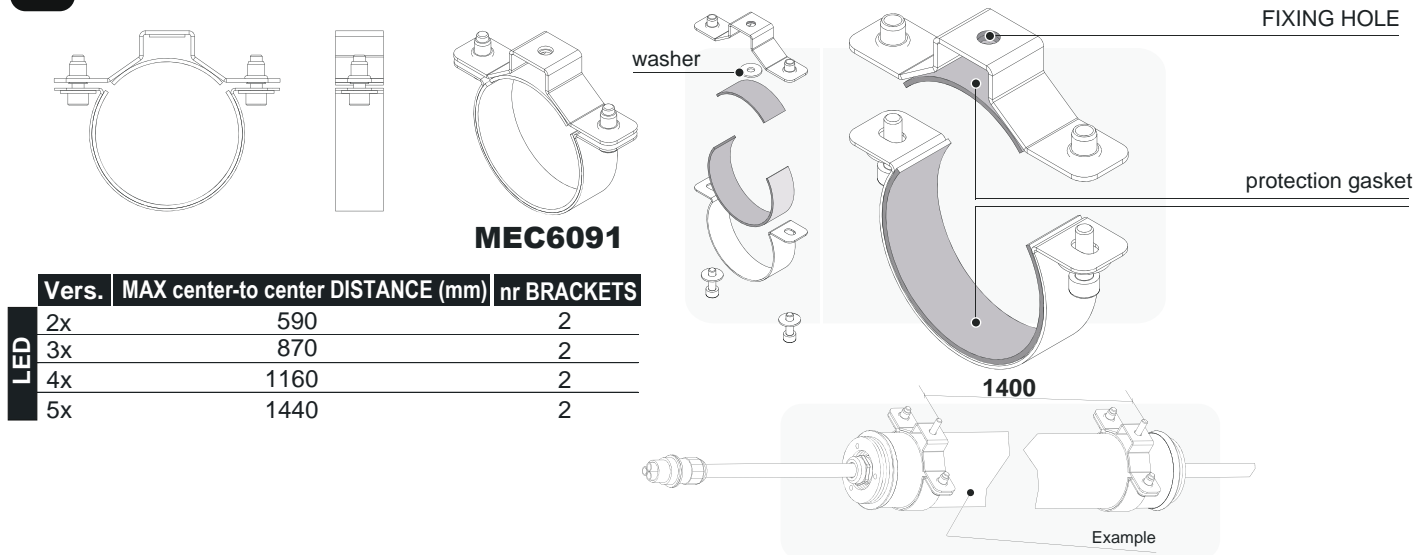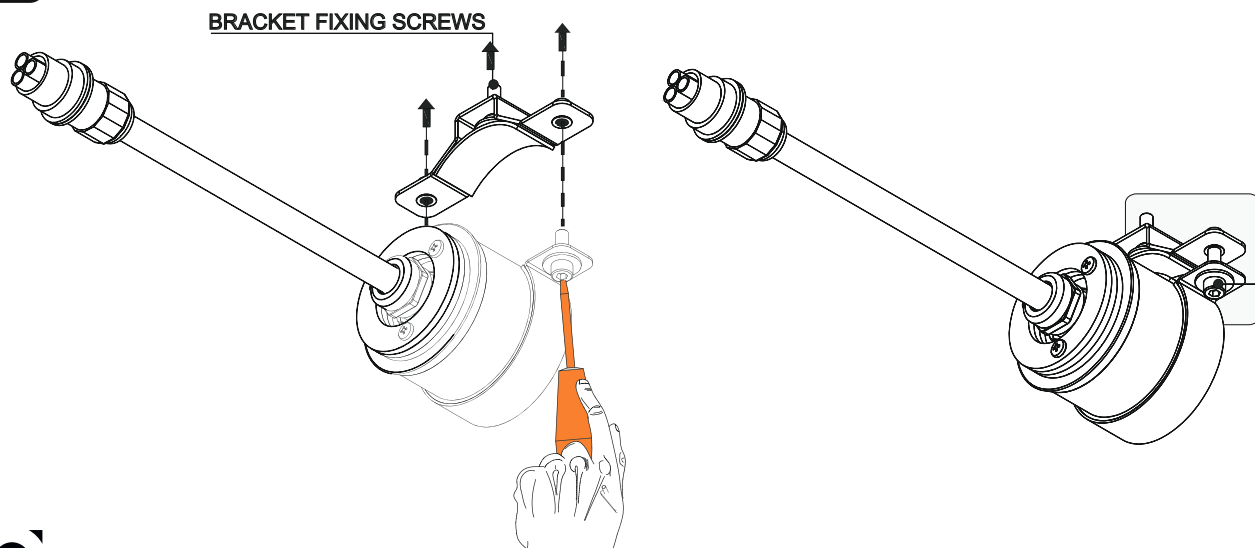
1 DRILL THE BRACKETS FIXING HOLES**2 MOUNT THE LIGHTING MODULES WITHOUT TIGHTENING UP THE SCREWS ALL THE WAY IN****CASTALDI**

Quality control: In case of complaint please get in touch with our company or its sales organization. Please give the number of your order as well as the serial number that recognizes the fixture. / Specifications are subject to change without notice!



SUSPENDED MOUNTING

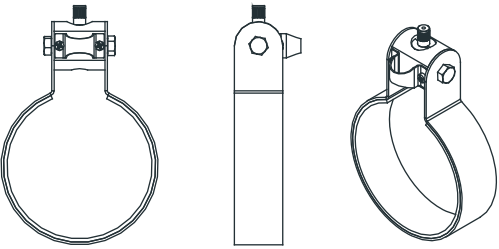



Vers.	MAX center-to center AXIS (mm)	nr BRACKETS
2x	590	2
3x	870	2
4x	1160	2
5x	1440	2

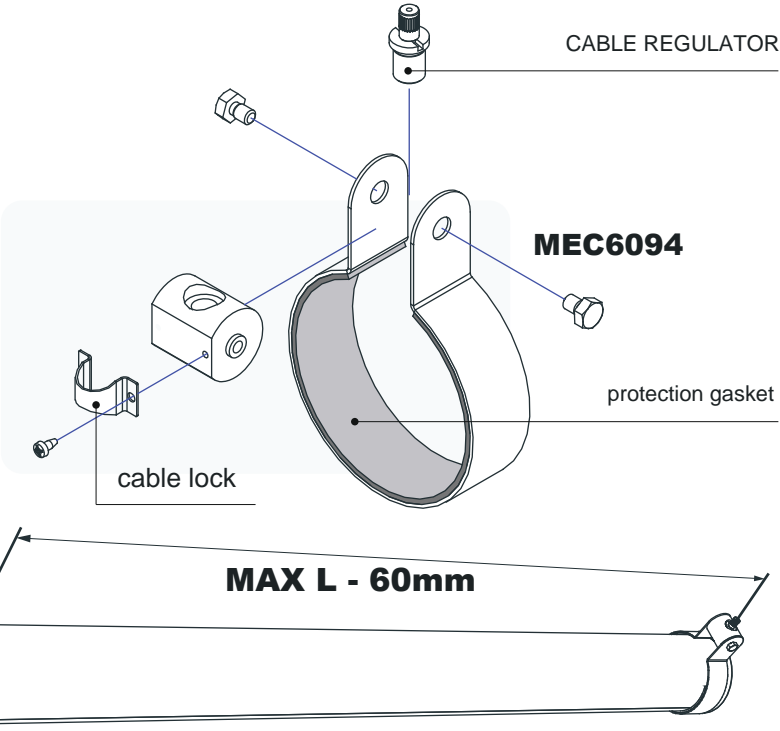

CEILING / WALL MOUNTING_50mm

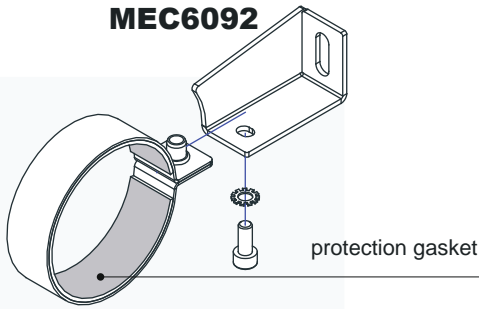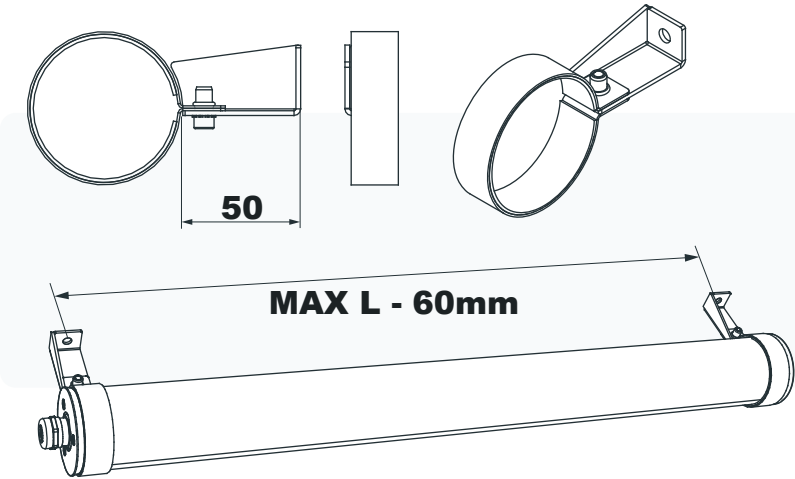

CEILING / WALL MOUNTING_100mm

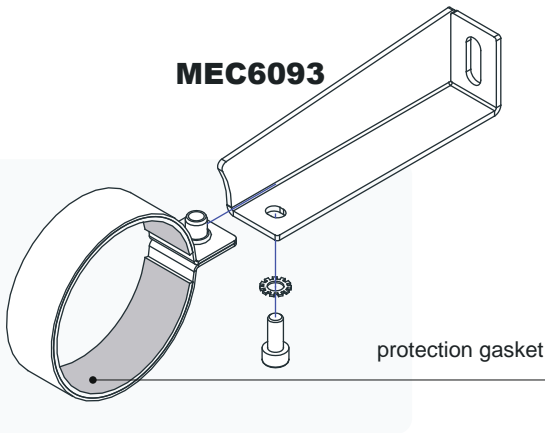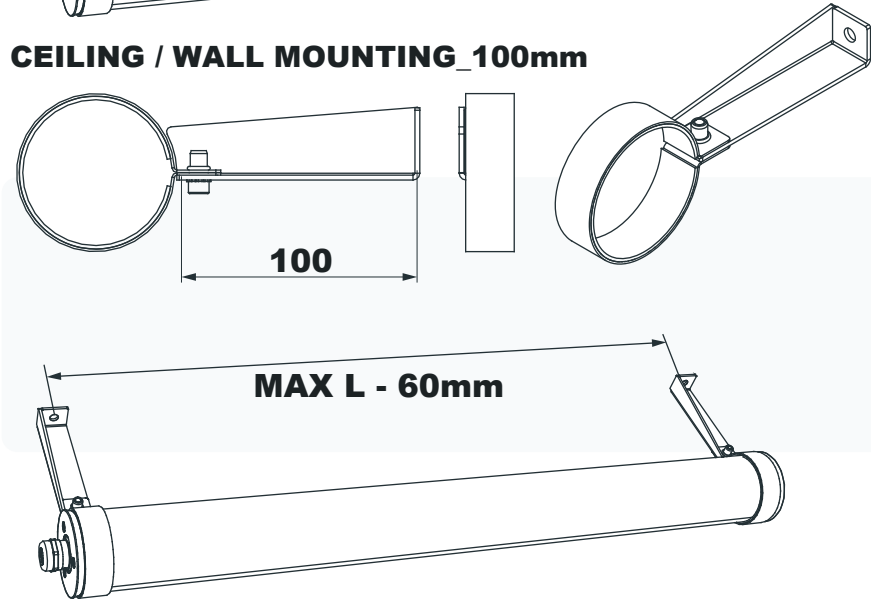


CHIARO Ø60_WIRING ACCESSORIES

IP68 CONNECTORS ACCESSORIES

MEC6096_3 POLES

MEC6097_5 POLES

MEC6096_3 POLES

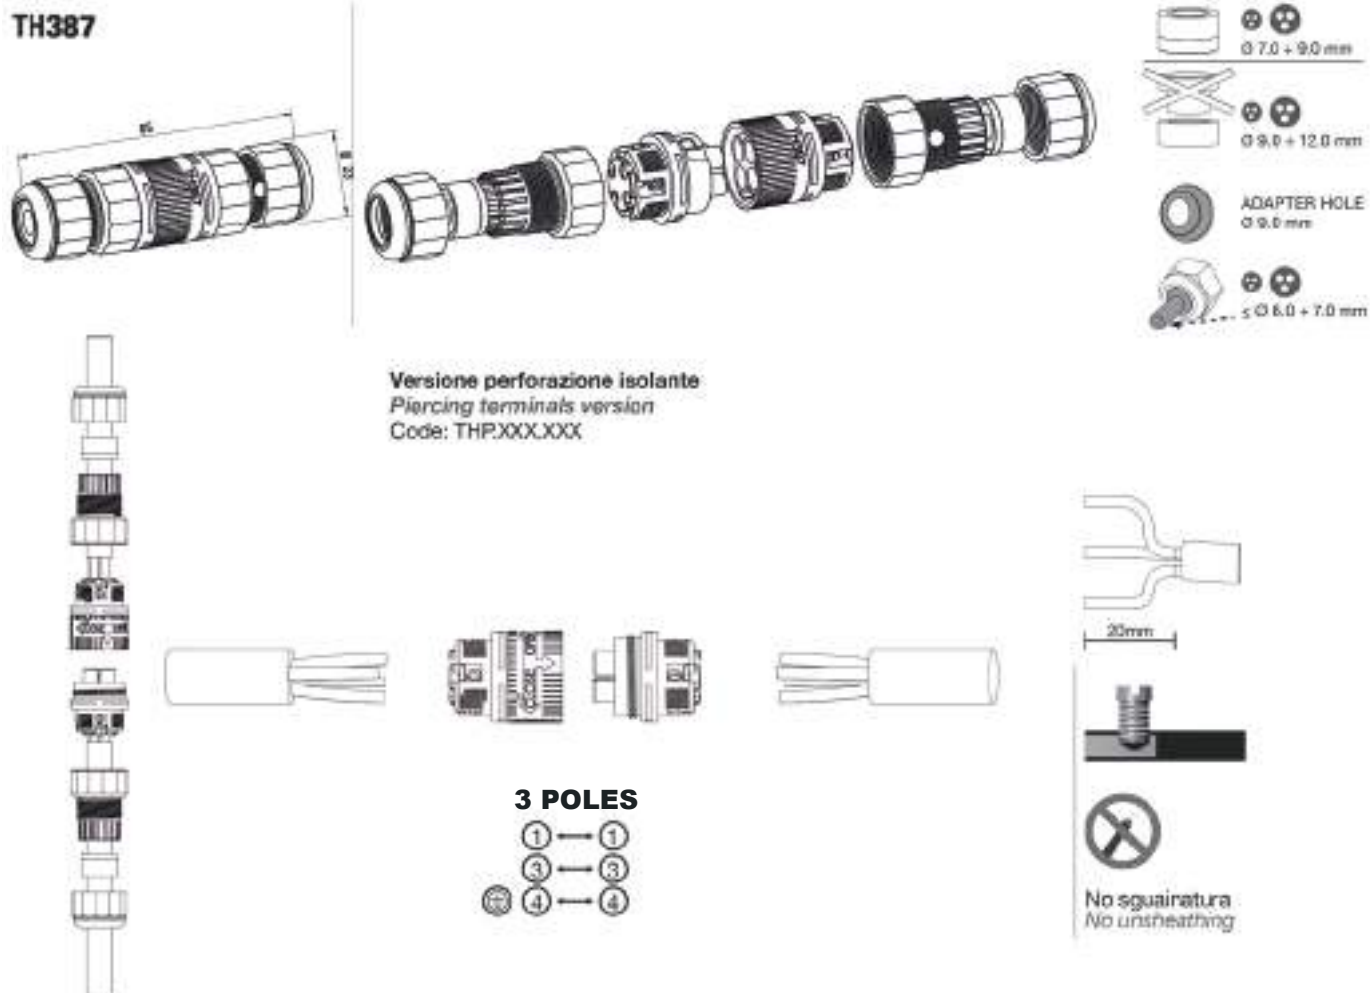

installation and maintenance sheet

CHIARO Ø60 LED IP66

MEC6097_5 POLES

TH387
IP68 3bar

MADE IN ITALY

TH387
2-3-4-5 POLES

